


TOP VIEW

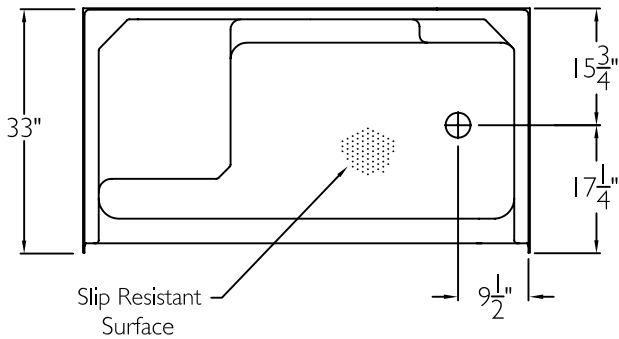

SUBMITTAL

This shower enclosure shall be model SSB 6032 SH MS Base left or right drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.


The unit shall have outside dimensions of 60" x 33" x 27" with a 4.0" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.


The enclosure shall be equipped with the following features:

- 1) Large molded seat, left or right,
- 2) Left or right drain location,
- 3) Slip resistant surface on floor,
- 4) Tile pattern,
- 5) Solid Surface finish,
- 6) 4.0" threshold.

FRONT VIEW

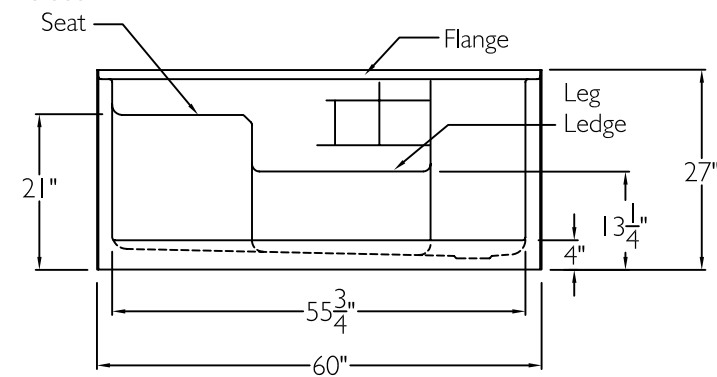

SIDE VIEW



THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 33". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 6032 SH MS 3P 4.0 L-R.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. SSB 6032 SH MS 4.0-L-R Base-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. SSB 6032 SH MS 4.0 L-R Pan	
	Rep			Date Issued. 4-23-12	Drawing Rev.
	Wholesaler			Material. Solid Surface	
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2"$	