





TOP VIEW

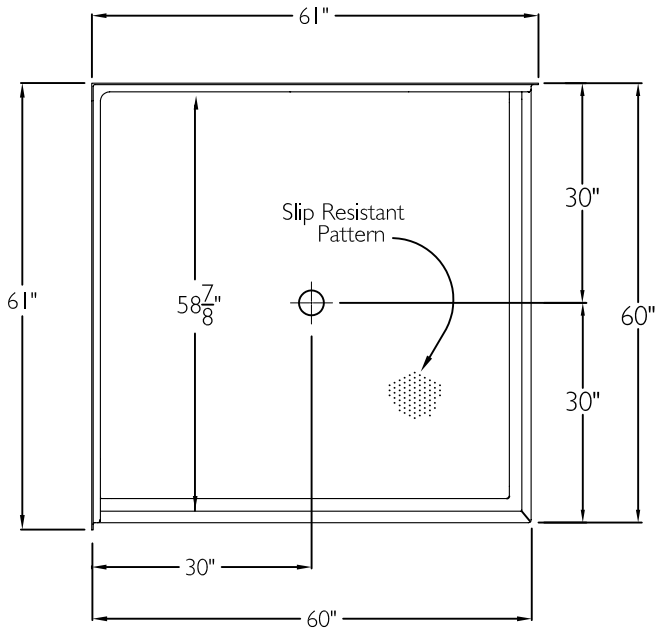

FRONT VIEW

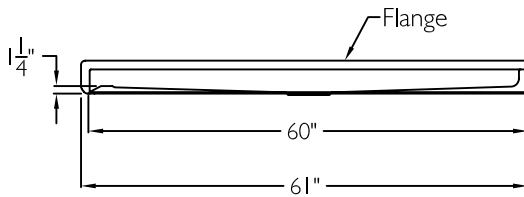

SIDE VIEW

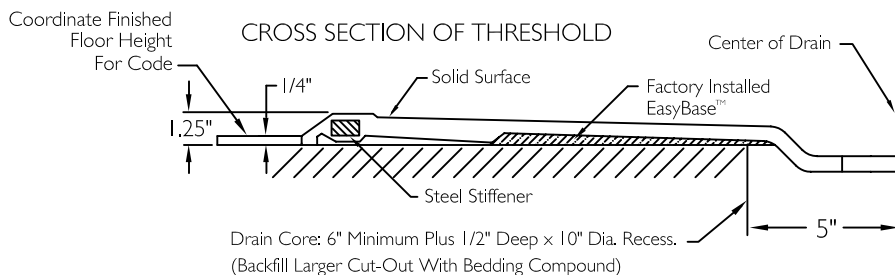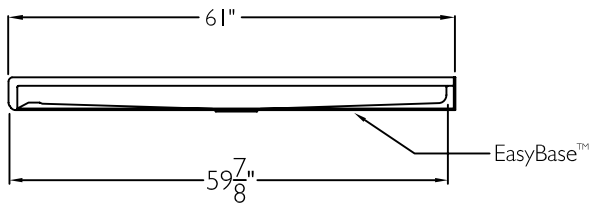

SUBMITTAL

This shower enclosure shall be model SSB 6048 BF DE 1.25 Base center drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 60" x 61" x 4 1/2" with a 1.25" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following features:

- 1) Low entry change of level threshold,
- 2) Double entry threshold,
- 3) EasyBase™ self sustaining bottom,
- 4) Slip resistant surface on floor,
- 5) Solid Surface finish,
- 6) 1.25" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 61". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 6060 BF DE 1.25 COL C.

| Job Name | Approved By | Name | Date | COMFORT DESIGNS | |
|--|-------------|------|------|--|--------------|
| Project No | Architect | | | Model No. SSB 6060 BF DE 1.25 COL C Base-I | |
| Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com | Engineer | | | Drawing No. SSB 6060 BF DE 1.25 FVB EB | |
| | Rep | | | Date Issued. 4-24-12 | Drawing Rev. |
| | Wholesaler | | | Material. Solid Surface | |
| | Comments | | | Color. | |
| | | | | Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm 1/2$ " | |