




TOP VIEW

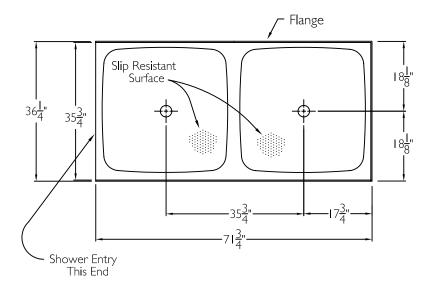

FRONT VIEW

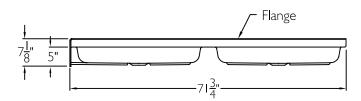

ENTRY END VIEW



SUBMITTAL

This shower enclosure shall be model XSB 3672 SH 5.0 Base center drains. Finished surface shall be of a sanitary grade acrylic exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 71 3/4" \times 36 1/4" \times 7 1/8" with a 5.0" threshold on one narrow end.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following features:

- 1) Acrylic finish,
- 2) Slip resistant surface on floor,
- 3) Double basins,
- 4) 5.0" threshold on one narrow end.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 71 3/4" AND 36 1/4" FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XAB 3672 SH 5.0 Base	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269	Engineer			Drawing No. XAB 3672 SH 5.0	
	Rep			Date Issued. 7-6-12	Drawing Rev
	Wholesaler			Material Acrylic	
	Comments			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com				Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	