


## TOP VIEW









## **SUBMITTAL**


This shower enclosure shall be model XSB 4836 BF .875 Base center drain. Finished surface shall be of a sanitary grade polyester gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 48"  $\times$  35 7/8"  $\times$  4 1/2" with a .875" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, NAHB, UPC, CSA, shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following features:

- 1) Low entry change of level threshold,
- 2) EasyBase<sup>™</sup> self sustaining bottom,
- 3) Slip resistant surface on floor,
- 4) Gelcoat finish,
- 5) 7/8" threshold.

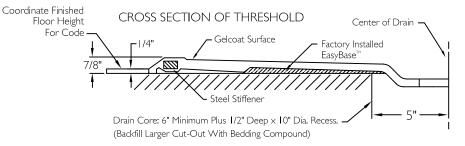

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 48" AND 35 7/8". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: XST 4836 BF, 875 COL.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XSB 4836 BF .875 COL Base-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Engineer			Drawing No. XSB 4836 BF .875 COL Easy Base	
	Rep			Date Issued. 4-21-12	Drawing Rev.
	Wholesaler			Material Gelcoat	
	Comments			Color.	
				Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm$ 1/2"	