




TOP VIEW

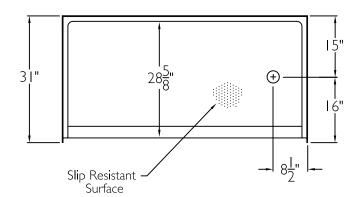

FRONT VIEW

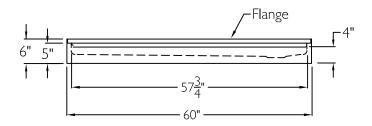

SIDE VIEW



SUBMITTAL

This shower enclosure shall be model XSB 6030 SH 4.0 Base left or right drain. Finished surface shall be of a sanitary grade $AcryIX^{TM}$ applied acrylic.

Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of $60" \times 31" \times 4~1/2"$ with a 4.0" threshold.

The unit shall meet ANSI Z124.1-2, BOCA, CSA B45.5, Home Innovation Research Lab, shall meet the requirements of the Southern Building Code.

HANDED BY THE DRAIN

NOTE: DUE TO THE COMPACT SIZE OF THIS PRODUCT, THE INTERIOR DEPTH DOES NOT COMPLY WITH IRC, IPC, AND UPC CODES.

The enclosure shall be equipped with the following features:

- 1) Applied acrylic finish,
- 2) Slip resistant surface on floor,
- 3) Left or right drain location,
- 4) 4.0" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 60" AND 31". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: XST 6030 SH 4.0 L-R.

Job Name	Approved By Print Name	Date	COMFOR	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. XSB 6030 SH 4.0	Model No. XSB 6030 SH 4.0 Base L-R	
Comfort Designs 435 Industrial Road Savannah, TN 38372	Architect		Drawing No. XSB 6030 SH 4.0	Drawing No. XSB 6030 SH 4.0 L-R	
	Engineer		Date Issued. 4-24-12	Drawing Rev. 6-7-17	
	Rep		Material. AcrylX™ applied	Material. AcrylX™ applied acrylic	
tel 800.443.7269	Wholesaler		Color.	Color,	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments		Dimensions are in inches. Dudimensions may vary ± 1/2"	Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	