



SUBMITTAL


This shower enclosure shall be model SSS 6237 BF, right, or left. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 62" \times 36 3/4" \times 77 3/4". The unit shall meet CSA B45.5-11, HUD, BOCA, NAHB, IAPMOZ124-2011, ADA, ANSI A117.1-2003, and shall meet the requirements of the Southern Building Code.

HANDED BY THE CENTER DRAIN.

The enclosure shall be equipped with the following accessories:

I) one 48" × I I/4" diameter I8 gauge white grab bar on the back wall, 2) two 28" × I I/4" diameter I8 gauge white grab bars, one on each side wall, all with I I/2" statute clearance, secured from the rear with stainless steel bolts, and 3" × 3" × II gauge metal mounting plates, 3) Tri-Cell backing on walls, 4) one inch diameter, I8 gauge white curtain rod with receiver cups, 5) factory installed EasyBase™ self sustaining bottom, 6) 3/4" Change Of Level threshold.

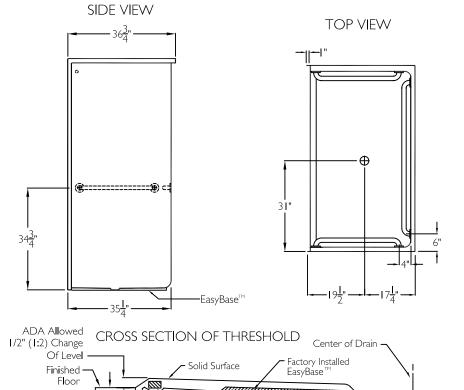

Steel Stiffener

Drain Core: 6" Minimum Plus 1/2" Deep \times 10" Dia. Recess. (Backfill Larger Cut-Out With Bedding Coumpound)

OPTIONAL ACCESSORIES: Factory Plumbing Install Option: YES NO					
☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)					
☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)					

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 62" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. SSS 6237 BF COL .75 U-Bar Package 2	
Comfort Designs 435 Industrial Road Savannah, TN 38372	Engineer			Drawing No. SSS 6237 BF COL .75 U-Bar Package 2 ADA with CR	
	Rep			Date Issued. 4-3-12	Drawing Rev. 1-7-12
	Wholesaler			Material. Solid Surface	
tel 800.443.7269	Comments			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com				Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	