

FRONT VIEW Curtain Rod Seam-Grab Bar L-Shaped Grab Bar 73⁵ Fold Up Seat Seam 34\2" 238 182 <u>-5</u>, 36" Note: L-grab bar must be loosened for -40" shower installation. SIDE VIEW



CROSS SECTION OF THRESHOLD

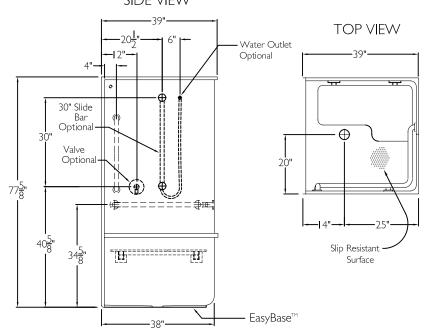

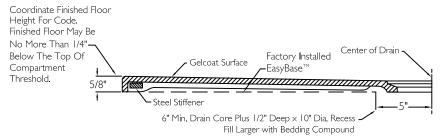

SUBMITTAL

This shower enclosure shall be model XSS 3637 BF 3P .625 right, or left. Finished surface shall be of a sanitary grade polyester resin exhibiting a minimal thickness of 15 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 40" \times 39" \times 77 5/8". The unit shall meet ANSI Z124.1-2. ANSI A117.1, ADA, HUD, BOCA, NAHB UPC, and shall meet the requirements of the Southern Building Code.

The enclosure shall be equipped with the following accessories:

1) One 20" × 33 1/2 × 1 1/4" diameter 18 gauge white L-grab bar, 2) one 24" × 1 1/4" 18 gauge white grab bar vertical on the valve wall, both with 1 1/2" statute clearance, secured from the rear with stainless steel bolts and 3" × 3" × 11 gauge metal mounting plates, 3) frameless 32" × 21" white HDPE fold up seat, 4) one inch diameter, 18 gauge white curtain rod with receiver cups, 5) 3 piece sectional design, 6) tri cell backing, 7) EasyBase™ self sustaining bottom, 8) 5/8" threshold.

OPTIONAL ACCESSORIES: Factory Plumbing Install Option: YES N	0			
☐ PB Pressure Balancing Mixing Valve (ADA / A	NSI)			
☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)				

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 40" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALOW BOLT CLEARANCE FOR A DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSED.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By	Name	Date	COMFORT DESIGNS	
Project No	Architect			Model No. XSS 3637 BF 3P .625-I	
Comfort Designs 435 Industrial Road Savannah, TN 38372	Engineer			Drawing No. XSS 3637 BF 3P .50 WLB WVB FHDP WCR VP EB	
	Rep			Date Issued. 4-3-12	Drawing Rev.
	Wholesaler			Material Gelcoat	
tel 800.443.7269	Comments			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com				Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	