
FRONT VIEW White Curtain Rod w/ Receiver Cups Soap 24" × I 1/4" Dishes White Grab Bar .18" × 33 1/2" × 1 1/4" White L-Grab Bar 763 32" × 21" 733' Frameless White HDPE Fold Up Seat 45g 393 $18\frac{3}{4}$ <u>-3</u>" -36 Location of Easy Base 38"



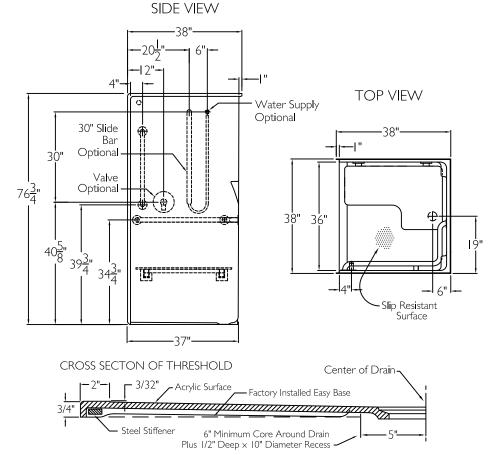

SUBMITTAL

This shower enclosure shall be model XSS 3838 BF .75, right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such a manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of $38" \times 38" \times 78"$. The unit shall meet CSA B45,5-11, HUD-UM73, ADA, ANSI A117.1, and Home Innovation Research Lab.

HANDED BY THE VALVE

The enclosure shall be equipped with the following accessories:

I) One $18" \times 33 \text{ I}/2" \times 1 \text{ I}/4"$ diameter 18 gauge white L-grab bar, 2) One $24" \times 1 \text{ I}/4"$ diameter white vertical grab bar, both with I I/2" statute clearance, secured from the rear with stainless steel bolts and $3" \times 3" \times 11$ gauge metal mounting plate, 3) $32" \times 21"$ white frameless padded fold up seat, 4) One inch diameter white curtain rod with receiver cups, 5) Molded corner soap ledges, 6) Tri-Cell backing on walls, 7) Factory installed Easy Base self sustaining bottom, 8) 3/4" threshold.

OPTIONAL ACCESSORIES:					
Factory Plumbing Install Option: YES NO					
☐ PB Pressure Balancing Mixing Valve (ADA / ANSI)					
☐ HH Hand held shower assembly with slide bar, vacuum breaker and 60" hose (ADA / ANSI)					

THIS UNIT FEATURES THE OUTSIDE DIMENSION OF 38" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS AND NUTS USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE MORE THAN 3/4" ON EITHER SIDE OF THE SHOWER WALLS. THIS MAY REQUIRE THE NEED TO NOTCH STUDS TO ALLOW BOLT CLEARANCE FORA DRYWALL ENCLOSED FIRE WALL INSTALLATION. ADJUSTMENT OF THE WALL BOARD MAY BE NECESSARY TO PROVIDE CLEARANCE OF THE BOLT(S) WHILE MAINTAINING THE INTEGRITY OF THE DRYWALL ENCLOSED FIRE WALL ENCLOSED FIRE WALL ENCLOSURE.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature	Model No. XSS 3838 BF .75			
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269 fax 731.925.4290 www.comfortdesignsbathware.com	Architect	c c		Drawing No. XSS 3838 BF .75 WLB WVB FHDP WCR Tri-Cell Easy Base	
	Engineer			Date Issued.	Drawing Rev. 11-14-16
	Rep			Material. Acrylic Surface	
	Wholesaler		Color.		
	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"		