


CROSS SECTION OF THRESHOLD



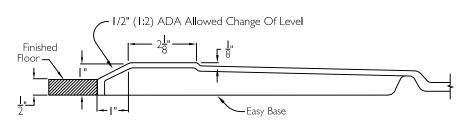

SUBMITTAL

This shower enclosure shall be model SSB 6232 BF 1.0 Base left or right drain. Finished surface shall be of a sanitary grade solid surface exhibiting a minimal thickness of 55 dry mils and a finished cured Barcoal hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 62 7/16" \times 32 1/4" \times 4 1/2" with a one inch Change Of Level threshold.

The unit shall meet ANSI Z124.1-2, BOCA, UPC, CSA, Home Innovation Research Lab, ADA, ANSI A117.1, and shall meet the requirements of the Southern Building Code.

HANDED BY THE DRAIN.

The enclosure shall be equipped with the following features:

- I) One inch Change Of Level Threshold,
- 2) EasyBase™ self sustaining bottom,
- 3) Slip resistant surface on floor,
- 4) Solid Surface finish.
- 5) Left ot right drain location.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 62 7/16" AND 32 1/4". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL: SST 6232 BF I.O L-R 5P.

Job Name	Approved By Print Name		Date	COMFORT DESIGNS	
Project No	Approved By Signature			Model No. SSB 6232 BF 1.0 COL L-R Base-1	
Comfort Designs 435 Industrial Road Savannah, TN 38372 tel 800.443.7269	Architect			Drawing No. SSB 6232 BF 1.0 COL L-R Easy Base	
	Engineer			Date Issued. 6-23-14	Drawing Rev
	Rep			Material Solid Surface	
	Wholesaler			Color.	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments			Dimensions are in inches. Due to the nature of the materials dimensions may vary \pm 1/2"	