


## CROSS SECTION OF THRESHOLD



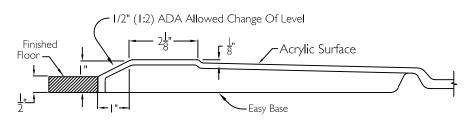

## **SUBMITTAL**

This shower base shall be model XSB 6232 BF 1.0 COL Base left or right. Finished surface shall be of a sanitary grade applied acrylic. The base shall be attached to the sump in such manner to form an integral part with an inner and outer coating of polyester resin. Unit construction shall be of a molded reinforced fiberglass with a 15% minimum fiberglass content.

The unit shall have outside dimensions of 62  $3/8" \times 32 I/4" \times 4 I/2"$ . The unit shall meet CSA B45.5-I I, HUD-UM73, ADA, ANSI AT17.1, and Home Innovation Research Lab.

## HANDED BY THE DRAIN

The enclosure shall be equipped with the following accessories:

- I) Low entry threshold,
- 2) Left or right drain location,
- 3) Easy Base self sustaining bottom,
- 4) Applied acrylic finish,
- 5) I.0" Change of level threshold.

NOTE: Inside dimensions comply with ADA, ANSI A117.1, guidelines for code compliant roll-in shower. Compliance may be met if code compliant walls with grab bars, seat, and valve package with hand shower are installed.

Walls and code compliant accessories by others.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 62 3/8" AND 32 1/4". FINISHED WALLS ABOVE THE SHOWER BASE BY OTHERS.

THIS SHOWER BASE IS AVAILABLE WITH SECTIONAL WALL SYSTEM MODEL; XST 6232 BF 1.0 COL L-R

Job Name	Approved By Print Name	Date	COMFORT DESIGNS	
Project No	Approved By Signature		Model No. XSB 6232 BF I.O COL L-R Base-I	
Comfort Designs	Architect		Drawing No. XSB 6232 BF I.O COL L-R Easy Base	
435 Industrial Road	Engineer		Date Issued. 6-23-14	Drawing Rev. 12-6-16
Savannah, TN 38372	Rep		Material. Acrylic Surface	
tel 800.443.7269	Wholesaler		Color.	
fax 731.925.4290 www.comfortdesignsbathware.com	Comments		Dimensions are in inches. Due to the nature of the materials dimensions may vary $\pm$ 1/2"	