


6" to 16" (152 mm to 406 mm) Centers 5 1/2" (140 mm) 2X 1 7/8" (48 mm) 8 5/16" Dia. (211 mm) (51 mm) 5 1/4" Dia. (133 mm) - 3x 1 1/8" to 1 1/2" (29 mm to 38 mm) Hole Size 3" (76 mm) Max. Deck Thickness 1/2 14NPSM

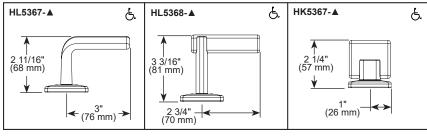

▲ Designate Proper Finish Suffix

BRIZO

BATHROOM FAUCET

- Allaria[™] Collection
- Two Handle Widespread Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three hole mount
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation
- 1/2-14 NPSM threaded inlets
- · Solid brass fabricated end valve and spout bodies
- · Spout features laminar water flow
- LHP Less Handle Program. See handle options below
- Drain sold separately

WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative. purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, I year from the date the product is received by the original purchasers or their received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A 112.18.1 / CSA B 125.1
- EPA WaterSensé®
- ICC/ANSI A117.1