


# BRIZO®

## WIDESPREAD VESSEL BATHROOM FAUCETS

- Virage® Bath Collection
- Two Handle Widespread Deck Mount

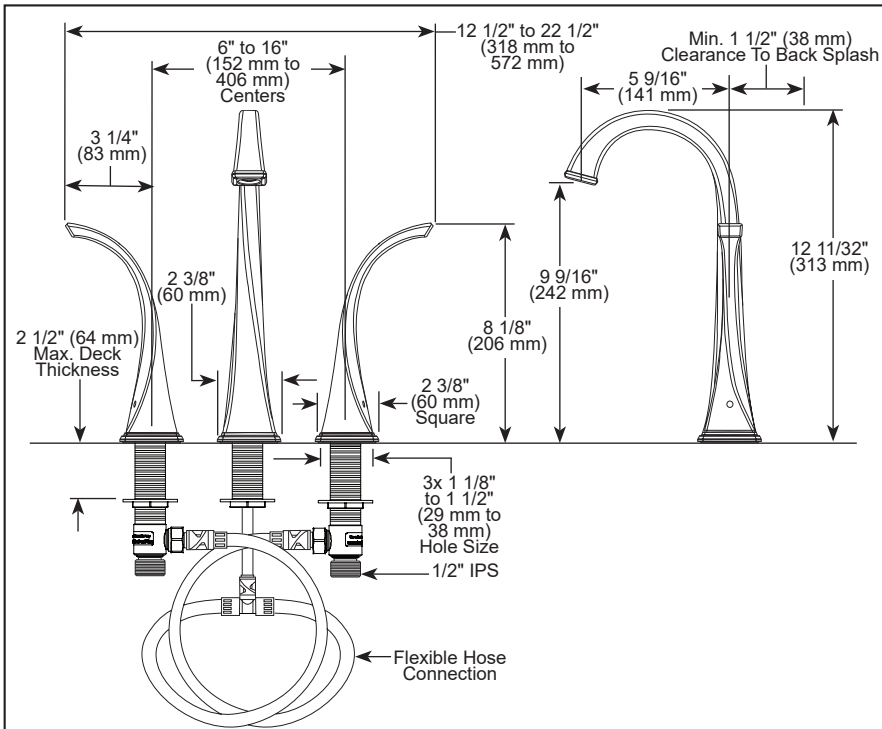

### STANDARD SPECIFICATIONS:

- Max flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Max flow rate (ECO models only) 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Three-hole mount
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation
- Metal grid strainer with overflow included
- Spout features laminar water flow

### WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to [www.brizo.com](http://www.brizo.com) for the complete details of our limited warranty.



<b>RP72411 ▲</b> Grid Strainer Drain less overflow holes 	<b>RP72413 ▲</b> Push Button Drain less overflow holes <p>2 3/4" (70 mm) Dia.</p>	<b>RP81627 ▲</b> Push Button Drain less overflow holes <p>1 5/8" (41 mm) Dia.</p>
<b>RP72412 ▲</b> Grid Strainer Drain with overflow holes (Included) 	<b>RP72414 ▲</b> Push Button Drain with overflow holes <p>2 3/4" (70 mm) Dia.</p>	<b>RP81628 ▲</b> Push Button Drain with overflow holes <p>1 5/8" (41 mm) Dia.</p>

▲ Designate Proper Finish Suffix

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only