

Electronic Flush Valves & Retrofit Kits

Trim Only for HARDWIRE operated electronic concealed flush valve for WALLHUNG WC with 1 1/2" BACK inlet-14" x 20" Front Access Cover

Model No: 1600T6102ATR-42

- IAPMO listed to CSA B125.3 and ASSE 1037
- ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1 of less than 5 lbs. handle operating force..
- Patented
- EPA WaterSense Listed

COMPLIES WITH:

(Contact Delta Representative for State and/or Local Approvals)







NOTES:

(3) Available Options for Field Conversion, see061047AHardwire with Battery Backup See DSP-BB for detailed specification.

SPECIFICATION:


- Hardwire (24 VAC) infrared electronic activated concealed flush valve system
- Stainless steel cover with integral sensor utilizing H2Optics® technology and S/S vandal resistant mounting screws
- Metal mounting box or frame, power function light, field selectable sensor range
- Preset blocking time, built-in activation delay
- Electronic manual override
- Solenoid operation valve
- HARD WIRE operated
- For WALLHUNG WC with 1 1/2" BACK inlet
- With 14" x 20" Front Access Wallplate
- Factory Set to 4.2L (1.1 Gal.) NOT FIELD ADJUSTABLE -RECOMMENDED FOR NEW CONSTRUCTION ONLY

OPERATION:

- 8 second blocking time
- 4 second activation delay
- Adjustable flush volume using adjustment screw on flush valve
- $_{\bullet}$ Selectable sensing distance: 24" to 56" in 8" increments. Factory set to 40"
- 24 hour courtesy flush factory set to off

(Dimensional drawing on following page)

Model No: 1600T6102ATR-42

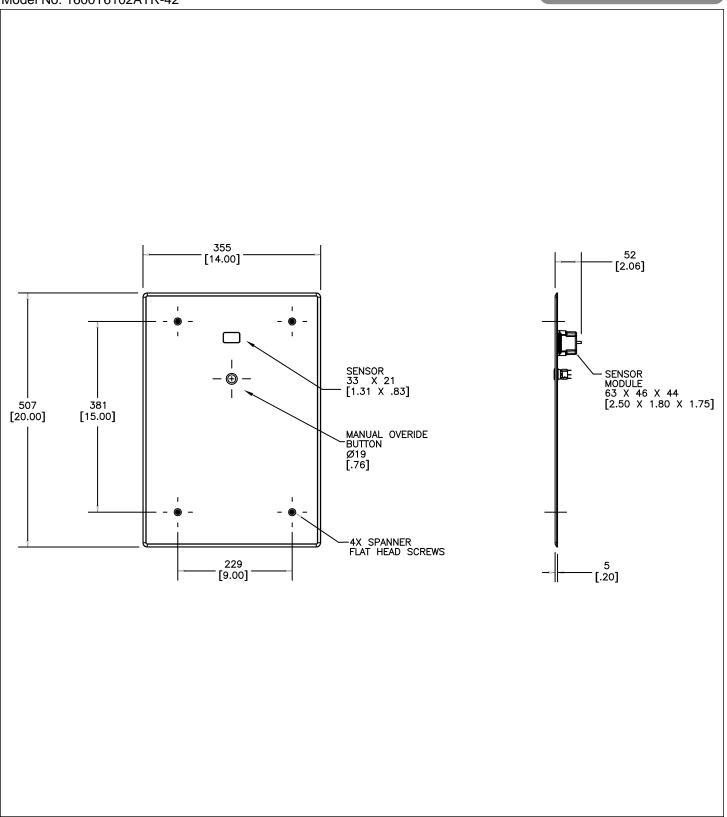

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced May 09, 2021.