



Manual Exposed Water Closet Flush Valve with Center Bumper

81T201-542

Description

Exposed manual flush valve for 1.5" (38 mm) top spud water closet fixture with quiet action chloramine-resistant diaphragm, fixed flush volume factory set to 1.1 gpf (4.2 Lpf) and cover center bumper.

Specification

- Flush Volume: Fixed, non-adjustable - factory set @ 1.1 gpf (4.2 Lpf)
- Fixture Type: Water closet with 1.5" (38 mm) top spud
- Valve Type: Water Closet Flush Valve with Center Bumper
- Operation: Oscillating handle

Features

- Quiet action Teck® concealed diaphragm flush valve for smooth and noise free operation
- Right or left-hand supply installation
- Chloramine resistant diaphragm
- Renewable seat for long-lasting durability and ease of maintenance
- Vacuum breaker
- Polished chrome-plated finish for an attractive and corrosion-resistant appearance
- Maximum 11.5" (292 mm) from centerline of valve inlet to top of water closet
- 1.0" (25 mm) FIP/Copper Sweat inlet adaptor, angle check stop with protecting cap
- Adjustable 4.75" ± 0.5 " (121 mm ± 13 mm) inlet/valve outlet centers
- Vandal-resistant cover screw
- ADA compliant metal oscillating handle actuator with "non hold open" feature for enhanced accessibility and precise control
- Cover tube, stainless steel wall flange, spud flange, spud nut, and 11.5" (292 mm) outlet tube
- Water conserving fixed, non-adjustable flush volume, factory set to 1.1 gpf (4.2 Lpf) for efficient water usage



Complies With

- ASSE 1037/ASME A112.1037/ CSA B125.37
- ICC / ANSI A117.1



(Contact Delta Representative for State and/or Local Approvals)

Optional Accessories

- **061390A** - Copper Defense conversion kits with CuVerro Shield bactericidal copper alloys for manual flush valve handle (**available in Canada Only**)

Operation

- Recommended water supply:
Minimum flowing pressure – 25 psi (172 kPa)
Minimum flow rate – 25 gpm (95 L/min)


NOTICE Dimensions are for reference only, measurements may vary ± 0.25 " (6 mm).
Maximum flow rates - 60 psi (414 kPa).

Masco Canada Limited reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

© 2024 Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

81T201-542

This spec was produced on December 13, 2024.

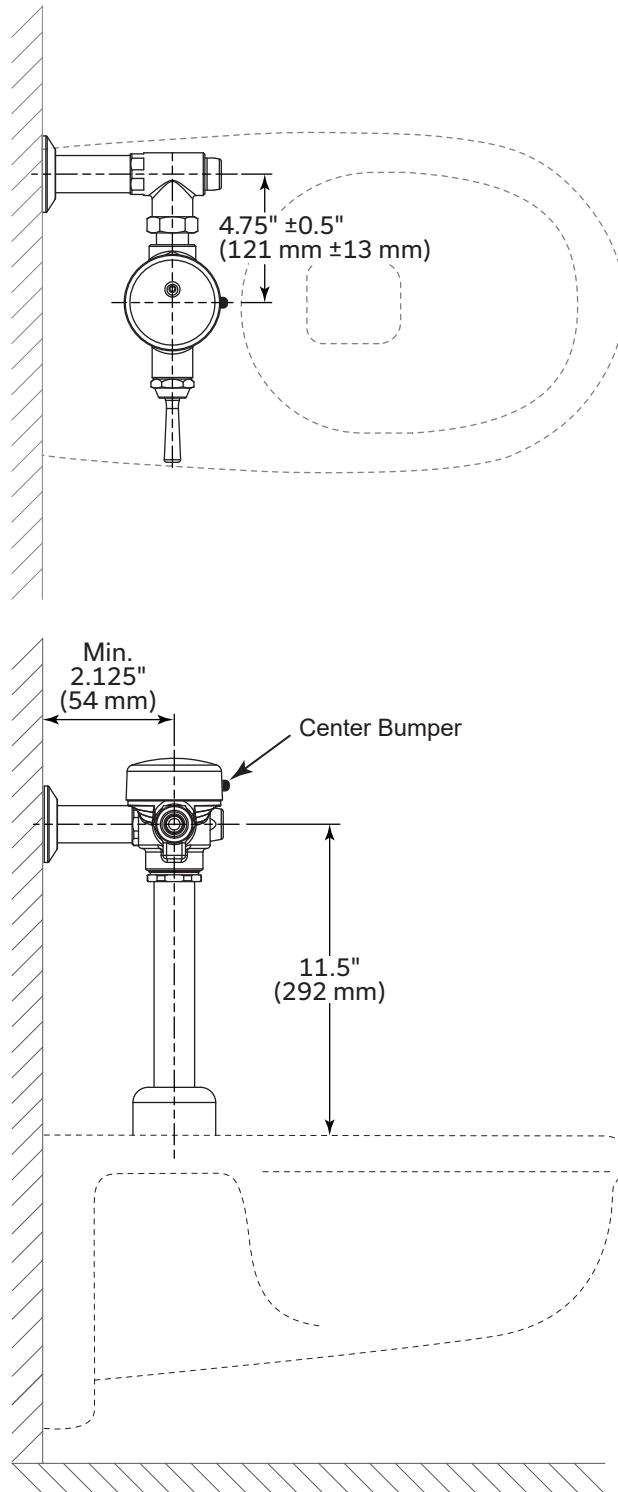

Teck® flush valves are designed to operate at any supply pressure between 20 psi and 125 psi in accordance with ASSE 1037/ASME A1 12.1037/ CSA B125.37. The Teck® flush valve delivers the industry's highest peak flows to enhance bowl scrubbing. At high water pressures, splash out, noise or reduced life of plumbing components may be observed with a few models of water closet or urinal fixtures. To minimize or eliminate these effects, select a different model of water closet or urinal from the same or another manufacturer, or install a pressure reducing valve. If the installation does not allow for either of these options, the control stop adjusting screw may be used to reduce pressure to the valve.

NOTICE Dimensions are for reference only, measurements may vary $\pm 0.25"$ (6 mm).
Maximum flow rates - 60 psi (414 kPa).

© 2024 Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

Masco Canada Limited reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

81T201-542
This spec was produced on December 13, 2024.