



COMMERCIAL



HDF® Hand Shower with Grab Bar with Adjustable Slide RPW336HDF-1.5C

Description

Introducing the HDF® Hand Shower Series, featuring a personal chrome ABS hand-held shower with a fixed spray and a push-button on-off control, though not a positive shut-off. This hand shower comes with backflow protection through two integral check valves. Experience an invigorating shower experience with a maximum flow rate of 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa) and a minimum flow rate of 1.13 gpm @ 45 psi (4.3 L/min @ 310 kPa). The package includes a 36" (914mm) stainless steel grab bar with adjustable slide for convenient positioning. For added flexibility, the hand shower includes a chrome-plated stretchable stainless steel hose, adjustable from 60 to 82" (1524 to 2083 mm). Accompanying the hand shower is a 90° chrome-plated wall supply elbow, with a 1/2" IPS female inlet and a 1/2"-14 NPSM male threaded outlet.

Specifications

- Shower: HDF® Hand Shower Series Personal chrome ABS hand held shower with fixed spray with push button on-off control-not a positive shut-off
- Hand Shower back flow protection provided by two integral certified check valves in series, which operate independently
- Flow Rate Max. - 1.5 gpm @ 80 psi (5.7 L/min @ 552 kPa)
- Flow Rate Min. - 1.13 gpm @ 45 psi (4.3 L/min @ 310 kPa)
- Grab Bar: 36" (914 mm) stainless steel with adjustable slide
- 60 to 82" (152.4 to 208.3 cm) chrome plated stretchable stainless steel hose
- 90° chrome plated wall supply elbow, 1/2" IPS female inlet; 1/2"-14 NPSM male threaded outlet

Operation

- Plumbing Codes require that shower heads and Hand Showers provide a small but continuous flow of water (trickle) when in "PAUSE" mode. Because of this continuous flow, in certain circumstances pressure variations in the water line and/or changes in the position of the shower temperature control handle while in "PAUSE" mode could result in dramatic changes to the temperature of the water when the shower head or hand shower is returned to the "ON" position.
- ALWAYS point the shower head away from yourself when returning to the "ON" position and feel the water with your hand before resuming your shower to ensure the water flow is not too hot or too cold.
- DO NOT allow children or others who might not understand this warning to use the "PAUSE" function.



Complies With

- ASME A112.18.1/CSA B125.1
- Hand Shower is compliant to ICC / ANSI A117.1
- EPA WaterSense® listed
- Hand Shower back flow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3



WaterSense® is a registered trademark of the U.S. Environmental Protection Agency.


Max. flow rates are at 80 psi (552 kPa), Min. flow rates @ 45 psi (310 kPa)

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

RPW336HDF-1.5C

This specification sheet was produced on December 06, 2023.

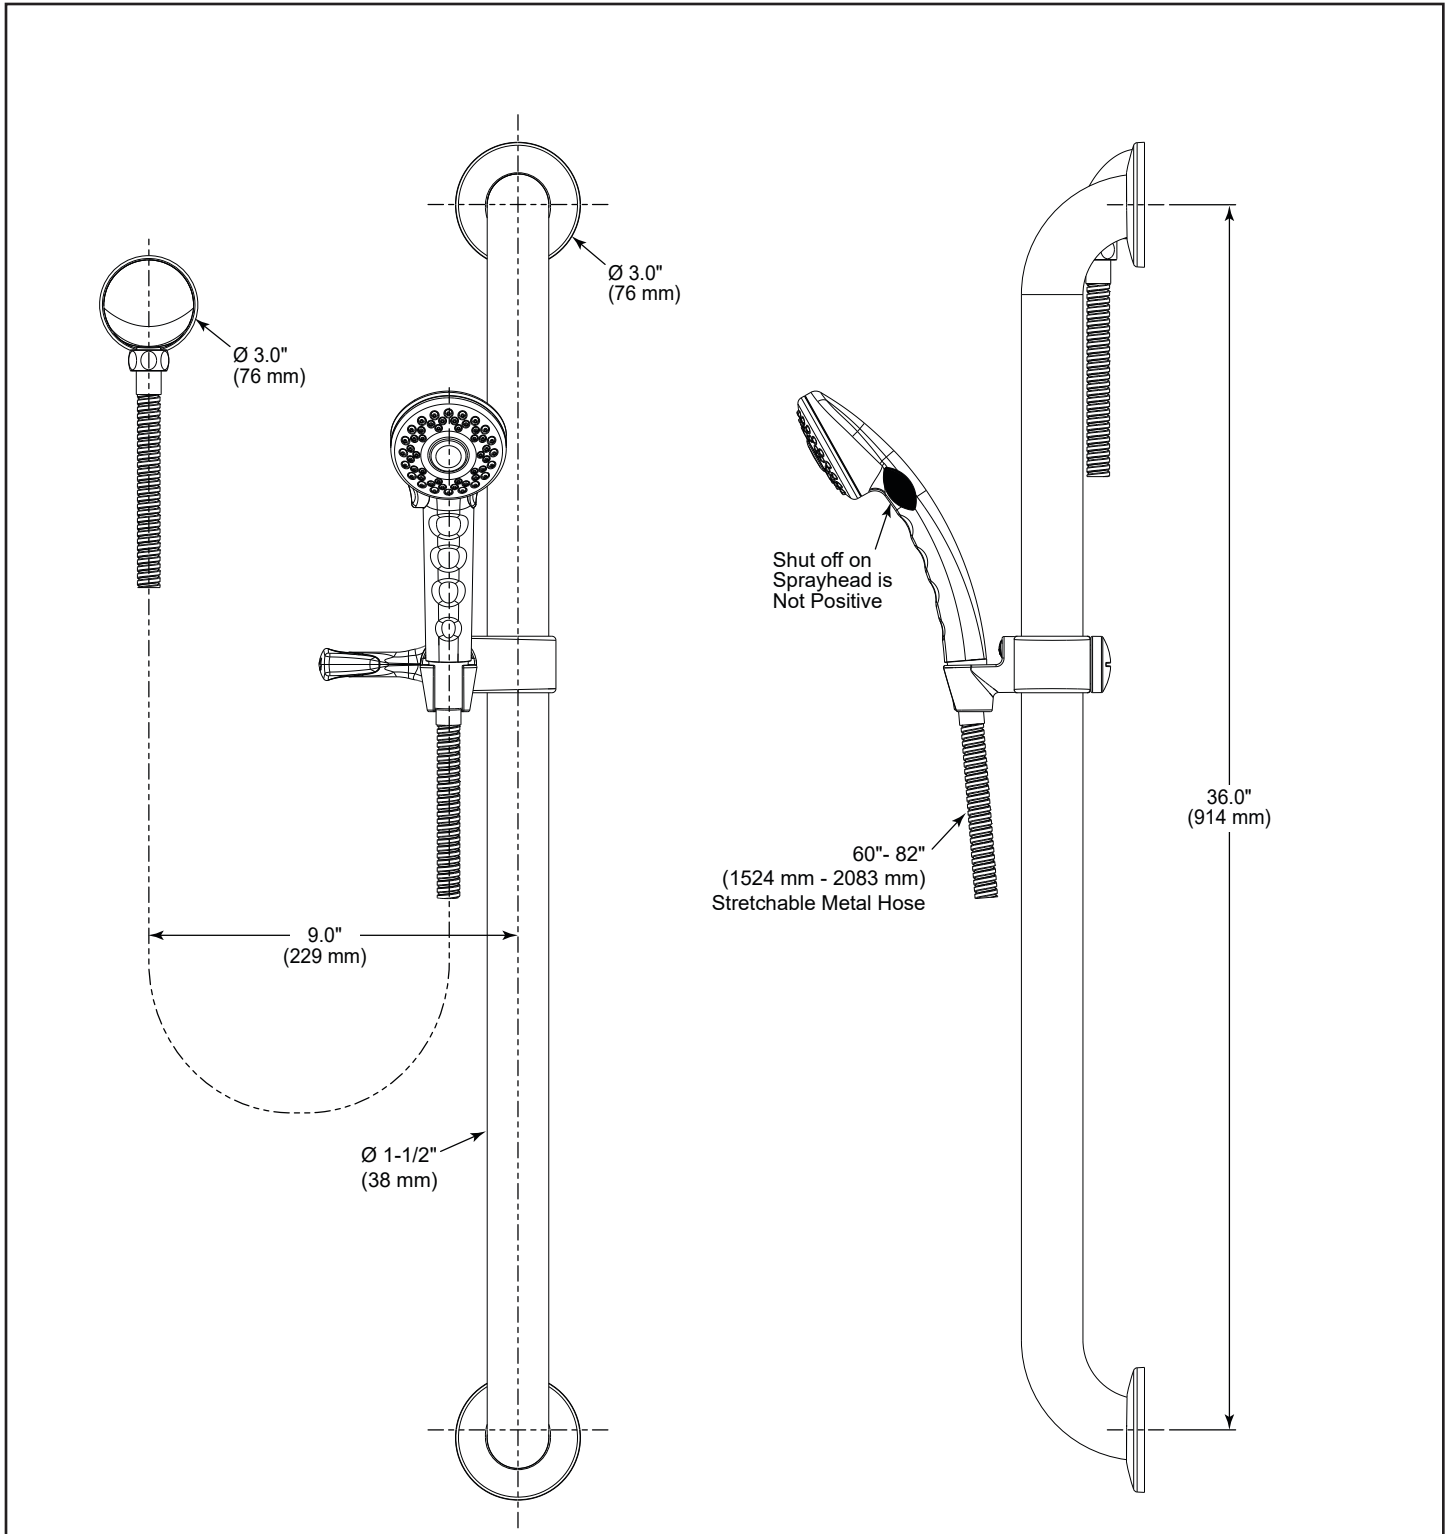

NOTICE • Dimensions are for reference **ONLY**.
• Measurements may vary $\pm 0.25''$ (6 mm).

WaterSense[®] is a registered trademark of the U.S. Environmental Protection Agency.

Max. flow rates are at 80 psi (552 kPa), Min. flow rates @ 45 psi (310 kPa)

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Check with local codes for requirements in your area.

Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

RPW336HDF-1.5C

This specification sheet was produced on December 06, 2023.