


Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

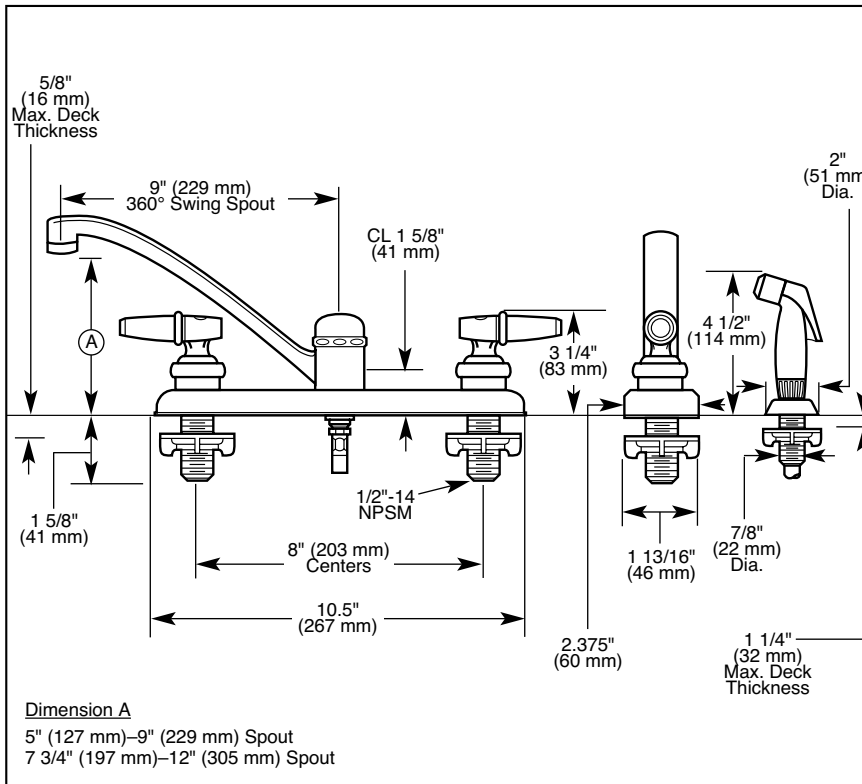

## KITCHEN FAUCETS

- Two Handle
- Deck Mount
- 3 and 4 Hole Sink Applications
- 8" (203 mm) Centers



**LISTED**  
 UL Listed to US and Canadian  
 Safety Standards and Classified  
 in accordance with  
 ANSI/NSF 61  
 21PL




### COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- NSF 61
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

### STANDARD SPECIFICATIONS:

- Two-handle kitchen deck faucets for mounting on 3 and 4 hole sinks.
- Solid brass fabricated body.
- 9" (229 mm) long spout swings 360°.
- Vandal resistant aerator.
- 8" (203 mm) centers.
- Vandal resistant brass lever handles.
- Red/blue colored handle bands indicate hot/cold temperature.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 1/4 turn stops, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 1/2"-14 NPSM threaded male inlet shanks.
- Model 2400 series with spray attachment has anti-siphon device as integral part of valve body.

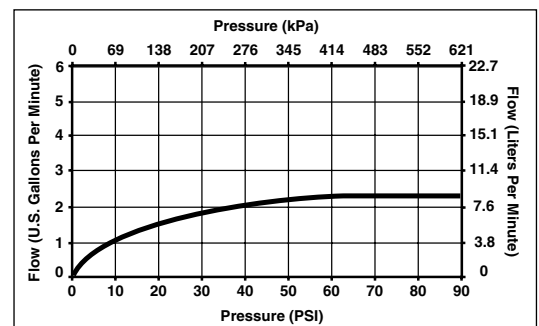

Standard Features	2100-HDF	2400-HDF
Washerless	◆	◆
Three Hole Installation	◆	
Four Hole Installation		◆
1/2"-14 NPSM Male Threaded Inlet Shanks	◆	◆
Vandal Resistant Brass Lever Handles with Red/Blue Indicators	◆	◆
Vandal Resistant Aerator	◆	◆
9" (229 mm) Long Spout Swings 360°	◆	◆
45" (1143 mm) Hose and Spray Assembly		◆
White Sprayhead		◆
Chrome Finish	◆	◆

**Available Options for Field Conversion:**

- 12" (305 mm) Long Swing Spout. Order RP5855.



Indianapolis, Indiana 46280  
 A Division of Masco Corporation of Indiana  
 © 2002 Masco Corporation of Indiana