


Submitted Model No.: _____

Specific Features: _____

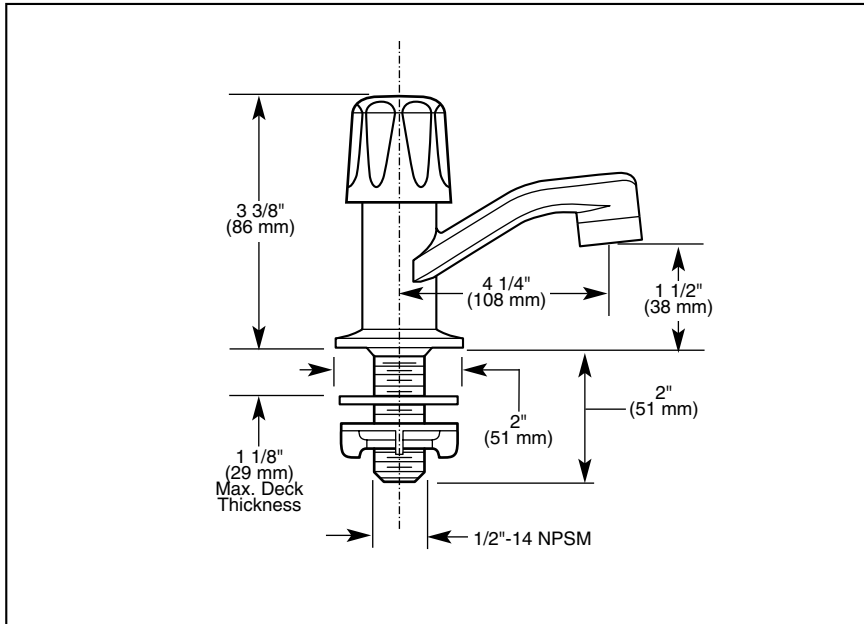

SPECIALTY FAUCETS

- Single Handle
- Basin Faucet
- Single Hole Sink Applications




COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Single handle deck basin faucet for exposed mounting on single hole sinks.
- Solid fabricated brass body.
- Can be used as hot or cold faucet.
- 4 1/4" (108 mm) long rigid spout.
- 2.2 gpm (8.3 L/min) vandal resistant aerator.
- Vandal resistant metal knob handle.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate with replaceable non-metallic seats operating in stainless steel lined sockets.
- Stem unit with brass stem, stainless steel plate and 1/4 turn stop.
- All operating parts shall be replaceable from the top.
- 1/2" - 14 NPSM threaded male inlet shank.
- 2" (51 mm) diameter escutcheon.

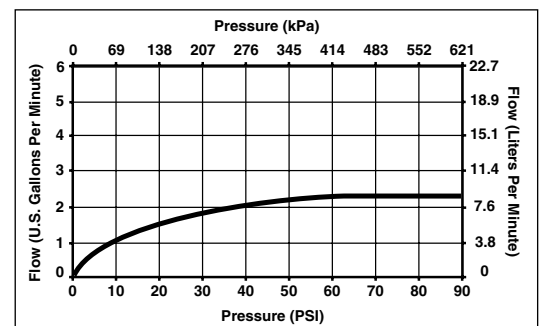

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

Standard Features	2303-HDF
Washerless	◆
Single Hole Installation	◆
Can be Used For Hot or Cold Faucet	◆
2.2 gpm (8.3 L/min) Vandal Resistant Aerator	◆
Vandal Resistant Metal Knob Handle	◆
4 1/4" (108 mm) Long Rigid Spout	◆
1/2"-14 NPSM Male Threaded Inlet Shank	◆
Chrome Finish	◆



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2002 Masco Corporation of Indiana