





LAVATORY FAUCETS

- Two Handle
- Deck Mount
- 2 and 3 Hole Sink Applications
- 4" (102 mm) Centerset

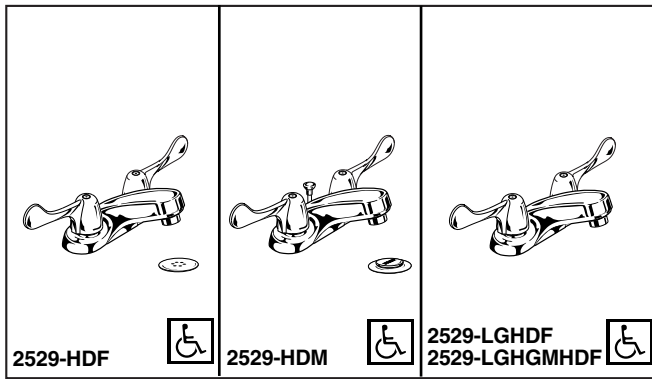


Submitted Model No.: _____

Specific Features: _____

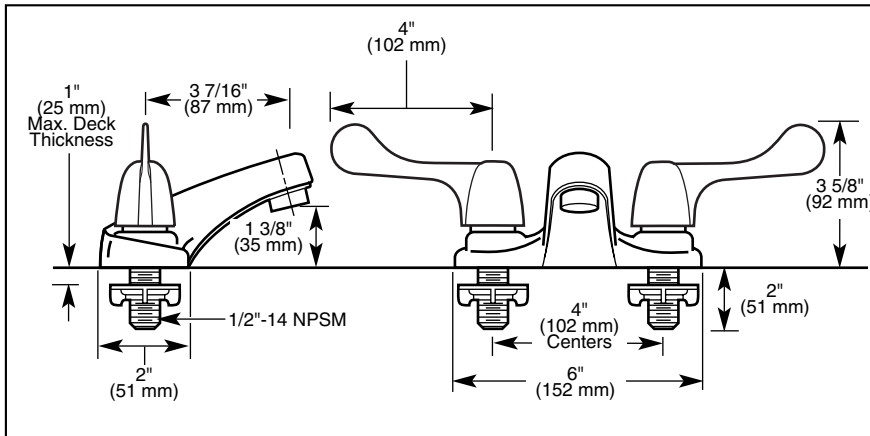


COMPLIES WITH:



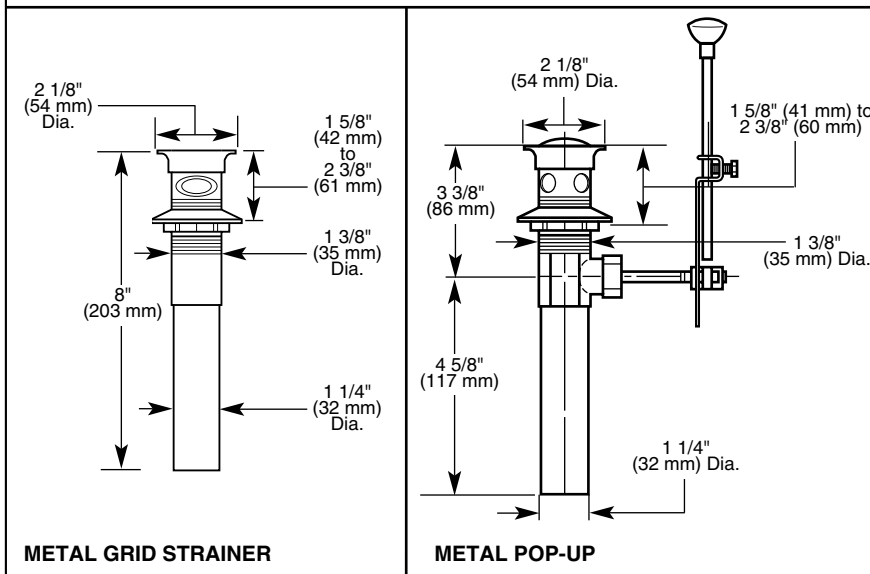

- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified

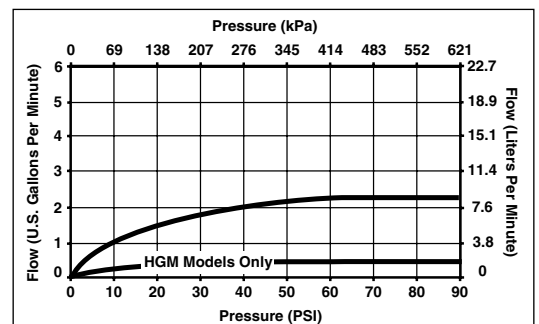

STANDARD SPECIFICATIONS:

- Two handle lavatory deck faucets for exposed mounting on two and three hole sinks.
- 4" (102 mm) centerset.
- Solid brass fabricated body.
- 3 7/16" (87 mm) long spout.
- Vandal resistant metal wrist blade handles. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 1/4 turn stops. Replaceable non-metallic seats operate in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- 1/2"-14 NPSM threaded male inlet shanks.
- Vandal resistant aerator or spray outlet.



Standard Features	2529-HDF	2529-HDM	2529-LGHDF	2529-LGHGMHDF
Washerless	◆	◆	◆	◆
4" (102 mm) Centerset	◆	◆	◆	◆
Two Hole Installation	◆		◆	◆
Three Hole Installation	◆	◆	◆	◆
3 7/16" (87 mm) Long Spout	◆	◆	◆	◆
Lift Rod Hole		◆		
.5 gpm (1.9 L/min) Vandal Resistant Spray Outlet				◆
2.2 gpm (8.3 L/min) Vandal Resistant Aerator	◆	◆	◆	
Vandal Resistant Wrist Blade Handles with Red/Blue Indicators				
1/4 Turn Handle Stops (Optional)	◆	◆	◆	◆
1/2"-14 NPSM Threaded Male Inlet Shanks	◆	◆	◆	◆
Metal Grid Strainer	◆			
Metal Pop-Up		◆		
Chrome Finish	◆	◆	◆	◆



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2002 Masco Corporation of Indiana