


Submitted Model No.	:
Specific Features:	



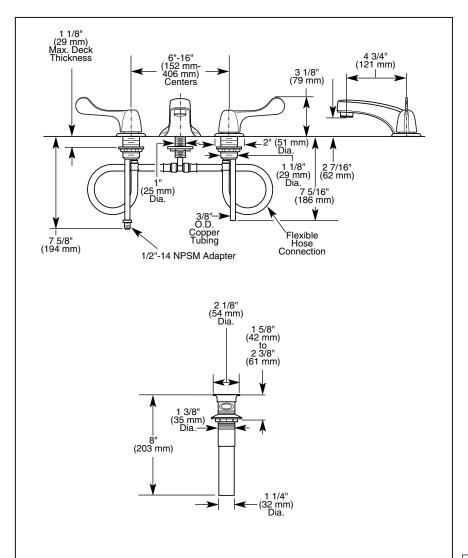

LAVATORY **FAUCETS**

- Two Handle
- Widespread
- Three Hole Sink Applications
- 6"-16" (152 mm-406 mm) Centers





COMPLIES WITH:


- ASME A112.18.1
- CSA B125

Indicates ADA compliance to CABO/ANSI A117.1

- IAPMO Listed
- CSA Certified

STANDARD SPECIFICATIONS:

- Two handle lavatory faucets for concealed mounting on three hole sinks.
- Solid brass fabricated end valves and spout body.
- Widespread 6"-16" (152 mm-406 mm) centers.
- 4 3/4" (121 mm) long rigid spout.
- Vandal resistant metal wrist blade handles. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 1/4 turn stops. Replaceable non-metallic seats operate in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- 2.2 gpm (8.3 L/min) vandal resistant aerator.
- 3/8" O.D. copper supply tube inlets with 1/2"-14 NPSM adapters.



Standard Features	3549-WFHDF	3549-WFLGHDF
Washerless		•
Three Hole Installation		•
6"-16" (152 mm-406 mm) Widespread Centers		•
4 3/4" (121 mm) Long Rigid Spout		•
2.2 gpm (8.3 L/min) Vandal Resistant Aerator		•
No Lift Rod Hole		•
Metal Wrist Blade Handles with Vandal Resistant		
Red and Blue Screws		占
1/4 Turn Handle Stops		•
3/8" O.D. Copper Tube Inlets with 1/2"-14 NPSM Adapters		•
Metal Grid Strainer		
Chrome Finish		•

Available Options for Field Conversion:

- Vandal resistant aerator with wrench 2.2 gpm @ 60 psi (8.3L/min @ 414 kPa). Chrome plated. Order RP246.
- Vandal resistant laminar flow spray outlet with wrench 2.2 gpm @ 60 psi (8.3L/min @ 414 kPa). Chrome plated. Order RP21966.
- Vandal resistant spray outlet with wrench .5 gpm (1.9L/min). Chrome plated. Order RP31704.

