


710-WFHDF
711-WFHDF

Submitted Model No.: _____

Specific Features: _____

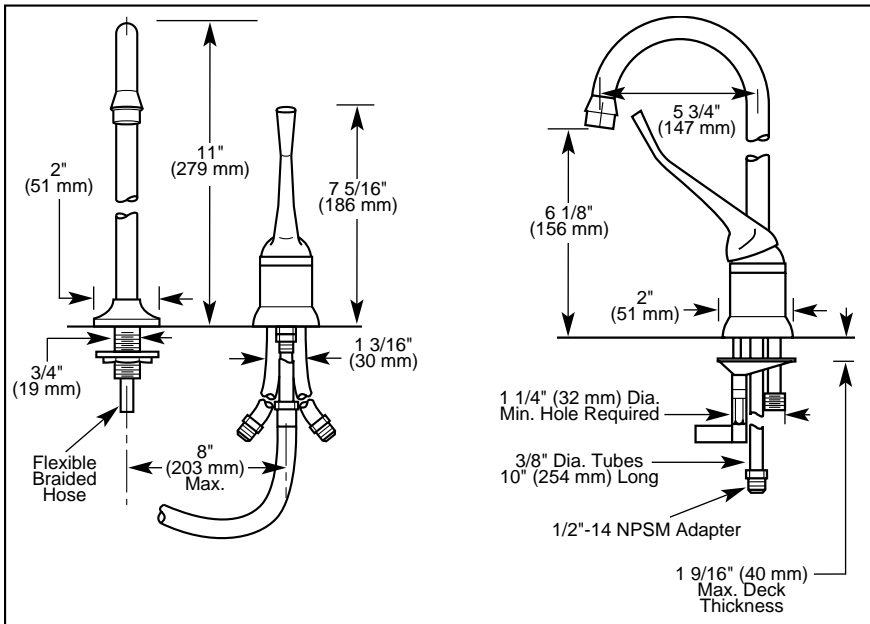

- Single Handle
- Utility Faucet
- Deck Mount
- 2 Hole Sink Applications
- 8" (203 mm) Maximum Centers

STANDARD SPECIFICATIONS:

- Single handle utility deck faucet for exposed mounting on two hole sinks.
- 8" (203 mm) maximum centers.
- Solid brass fabricated body.
- 5 3/4" (147 mm) long, 11" (279 mm) high gooseneck spout. Rigid (710), 360° Swing (711).
- Vandal resistant 6" (152 mm) elbow handle. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control handle returns to the neutral position when valve is turned off.
- Adjustable handle limit stop.
- 2.2 gpm (8.3 L/min) laminar flow outlet.
- Models have 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.



COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to CABO/ANSI A117.1
- IAPMO Listed
- CSA Certified

