


Submitted Model No.: _____

Specific Features: _____

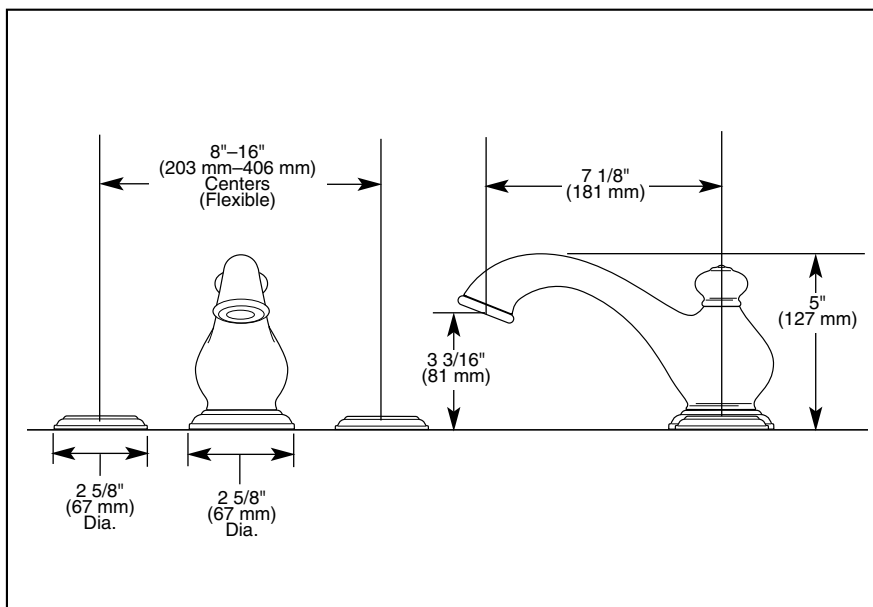

BATH VALVES

- Leland™ Series
- Two Handle Roman Tub Faucet
- Trim Only
- Rough-In Kit Must Also be Ordered to Complete Installation
- Three Hole Installation
- 7 1/8" (181 mm) Long Rigid Slip-On Spout
- Mount on Deck or Ledge
- Temperature and Volume Controlled with Handles



COMPLETE VALVE COMPLIES WITH:


- ASME A112.18.1
- CSA B125
- Indicates ADA compliance to ICC/ANSI A117.1

TRIM STANDARD SPECIFICATIONS:

- Trim Only for two handle Roman Tub faucet for concealed mounting.
 - Less Handle Program. See handle kit on back.
 - 7 1/8" (181 mm) long slip-on rigid spout.
 - Temperature and volume controlled with handles.
- NOTE: Rough-In kit must also be ordered to complete installation. Refer to rough-in kits and installation aids on back to determine the best kit for your situation. There are separate specification sheets on each rough-in kit if more details are required.



ROUGH-IN KIT STANDARD SPECIFICATIONS:

- Washerless.
- Three hole installation.
- 5/8" O.D. copper supply inlet/outlet tubes. R2707 outlet tubes are corrugated copper.
- R2707-Flexible widespread mount.
- RP23601-10" (254 mm) fixed centers.
- Deck or ledge mount installation.
- Solid fabricated brass end valves and spout body.
- Control mechanism is a rotating cylinder with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Hot and cold stems are interchangeable.
- Temperature and volume controlled with handles.
- All operating parts shall be replaceable from the top.

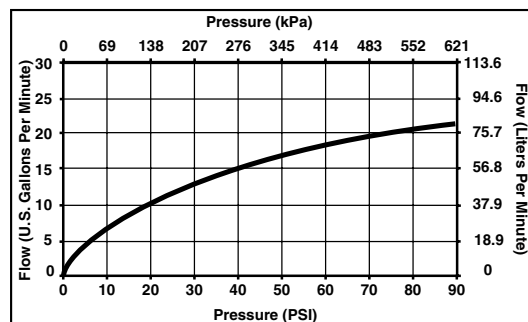

Standard Features—Trim	2779-SSLHP	T2779-LHPTP
7 1/8" (181 mm) Long Rigid Slip-On Spout	◆	◆
Less Handle Program—See Handle Kit*	◆	◆
2 5/8" (67 mm) Diameter Handle Bases*	◆	◆
Chrome Finish		◆
Brilliance® Stainless Finish	◆	


*Available LHP Handle Kit
 ▲=Specify Finish




Available Options for Field Conversion:

- Roman Tub hand showers and bath waste assemblies are available separately.


Rough-In Kits:




- R2707
- Adjustable rough-in — adjusts to 2 1/2" (63.5 mm) maximum deck thickness.
 - Conventional or thick tile rough-in.
 - The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers—aligns widespread handles. Order RP22132.



- RP18227
- Conventional rough-in—adjusts to 1 1/4" (32 mm) maximum deck thickness. Order RP18227.
 - End valve adjustment wrench (for RP18227 and RP18235 rough-in kits). Order RP16867.
 - The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers—aligns widespread handles. Order RP22132.



- RP23601
- 10" (254 mm) fixed conventional rough-in adjusts to 1 1/4" (32 mm) maximum deck thickness. Order RP23601.



- RP18235
- Thick tile rough-in—mounts to deck prior to mud and tile—adjusts to 3 1/4" (83 mm) maximum deck thickness. **Requires RP16867 wrench to adjust.** Order RP18235.
 - End valve adjustment wrench (for RP18227 and RP18235 rough-in kits). Order RP16867.
 - The Helpful Hand for 4" (102 mm) to 16" (406 mm) centers—aligns widespread handles. Order RP22132.



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2004, Masco Corporation of Indiana