


Submitted Model No.: _____

Specific Features:



lacktriangle Designate proper finish suffix

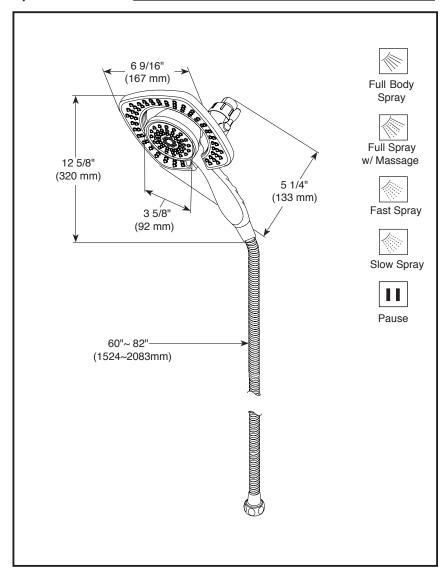



- 2-In-1 shower
- 5-spray settings handshower
- Touch-Clean® nozzles

STANDARD SPECIFICATIONS:

- Integrated handshower docks securely into showerhead when not in use.
- Operate hand shower, showerhead or use both at the same time.
- 3-way diverter activates sprays.
- Easy turn spray lever for simple spray selction.
- 60" 82" stainless steel stretchable hose.
- Maximum flow rate 2.5 gpm (9.5 L/min) @ 80 PSI.
- Actual water consumption 2.1 gpm (8.0 L/min)@ 45 psi.
- For use with automatic compensating valves rated at 2.0 gpm (7.6 L/min) or less.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries

COMPLIES WITH

- ASME A112.18.1 / CSA B125.1 ◆
- ◆ Your Delta Faucet handshower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3 and ASME A112.18.1/CSA B125.1. It incorporates two certifled check valves in series, which operate independently and are integral, nonserviceable parts of the wand assembly.

