


Submitted Model No.:\_\_\_\_

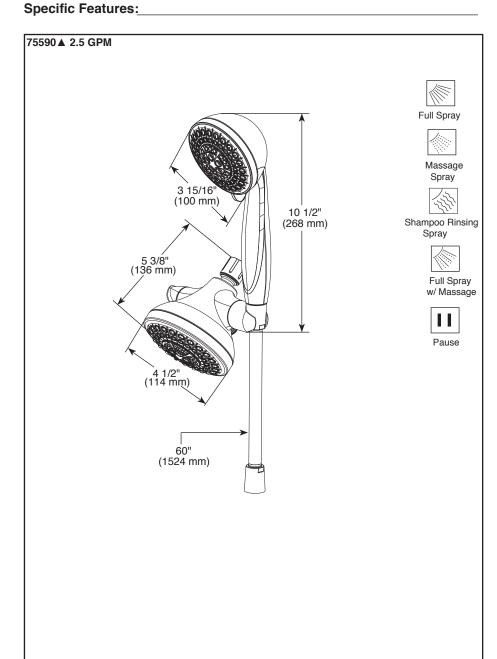

▲ Designate proper finish suffix

**O**DELTA

- Combination shower
- Touch-Clean® nozzles
- 5-spray settings handshower

## **STANDARD SPECIFICATIONS:**

- 3-way diverter / mount for handshower.
- 60"(1524mm) ribbon hose.
- Operate handshower, showerhead or use both at the same time.
- Maximum water consumption 2.5 gpm (9.5 L/min)
  80 psi.
- Actual water consumption 2.2 gpm (8.32 L/min)
  45 psi.
- For use with automatic compensating valves rated at 2.0 gpm (7.6 L/min) or less.

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH**

ASME A112.18.1/CSA B125.1

