


11926-DST



Submitted Model No.:

Specific Features:

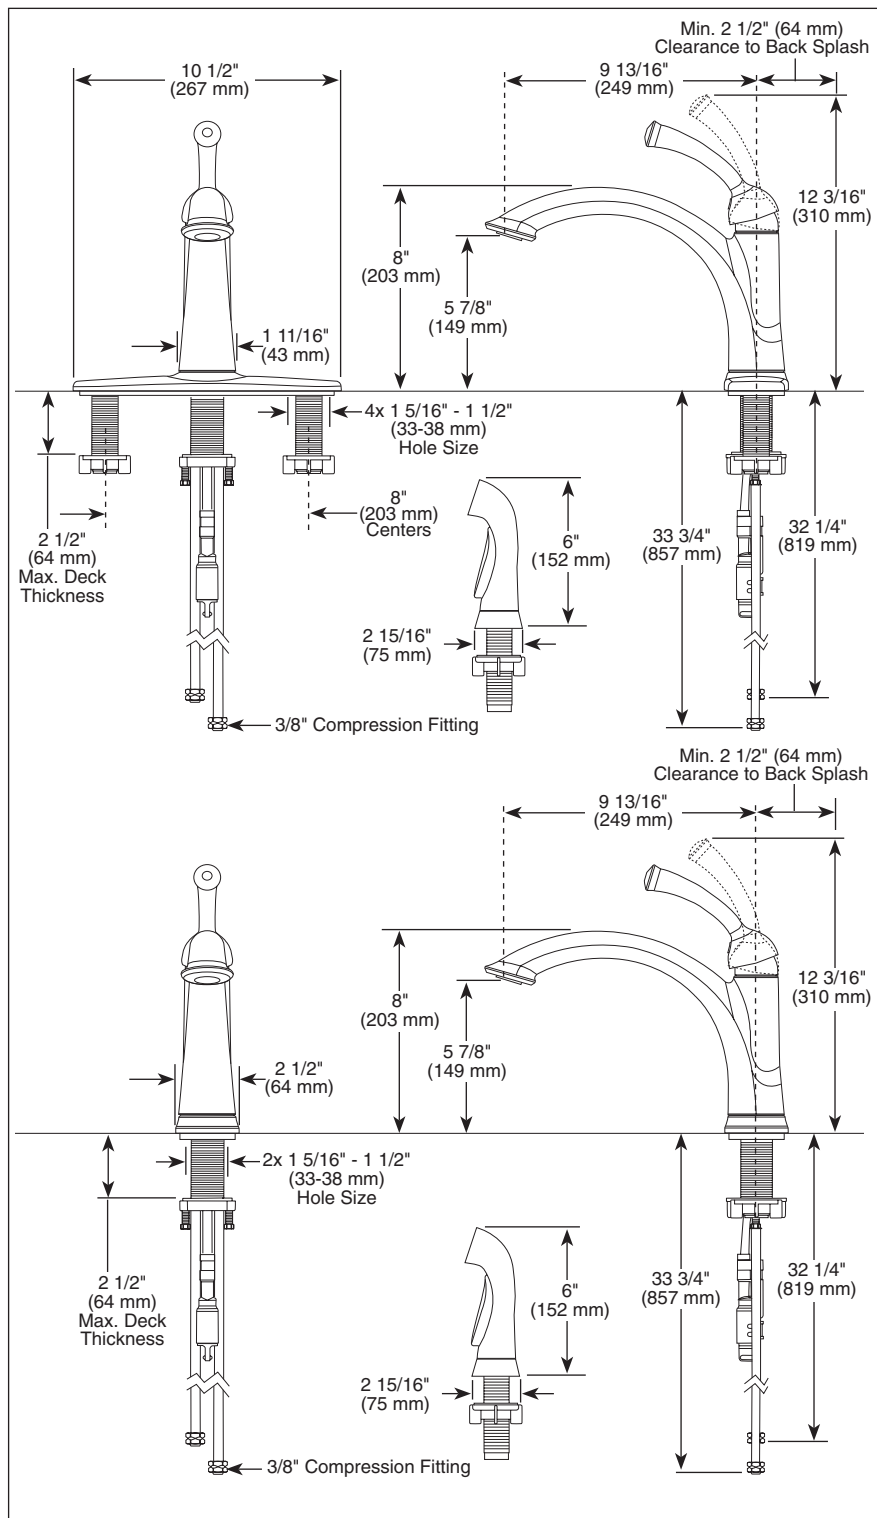

KITCHEN FAUCETS

- Lewiston® Series
- Single Handle Deck Mount
- 1, 2, 3 or 4 Hole Sink Applications
- DIAMOND™ Seal Technology
- Integrated Supply Tubes
- Quick-Snap® Vegetable Sprayer Hose Installation

STANDARD SPECIFICATIONS:

- Maximum flow rate 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa.
- Single handle kitchen faucets for exposed mounting on 1, 2, 3 and 4 hole sinks.
- Centermount or 8" (203 mm) centers with optional 10 1/2" (267 mm) long escutcheon included.
- 12 3/16" (310 mm) high, 9 13/16" (249 mm) long spout, swings 120°.
- Quick Snap® vegetable sprayer hose with matching finish sprayhead - 45" (1143 mm) long hose.
- Lever handle shall return to neutral position when valve is turned off.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- 3/8" O.D. straight, staggered pex supply tubes - 32 1/4" (819 mm) and 33 3/4" (857 mm) long.
- Standard 3/8" (10 mm) compression gasket fittings.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1

- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2015 Masco Corporation of Indiana

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-11926-DST Rev. C