


Submitted Model No.: _____

Specific Features: _____

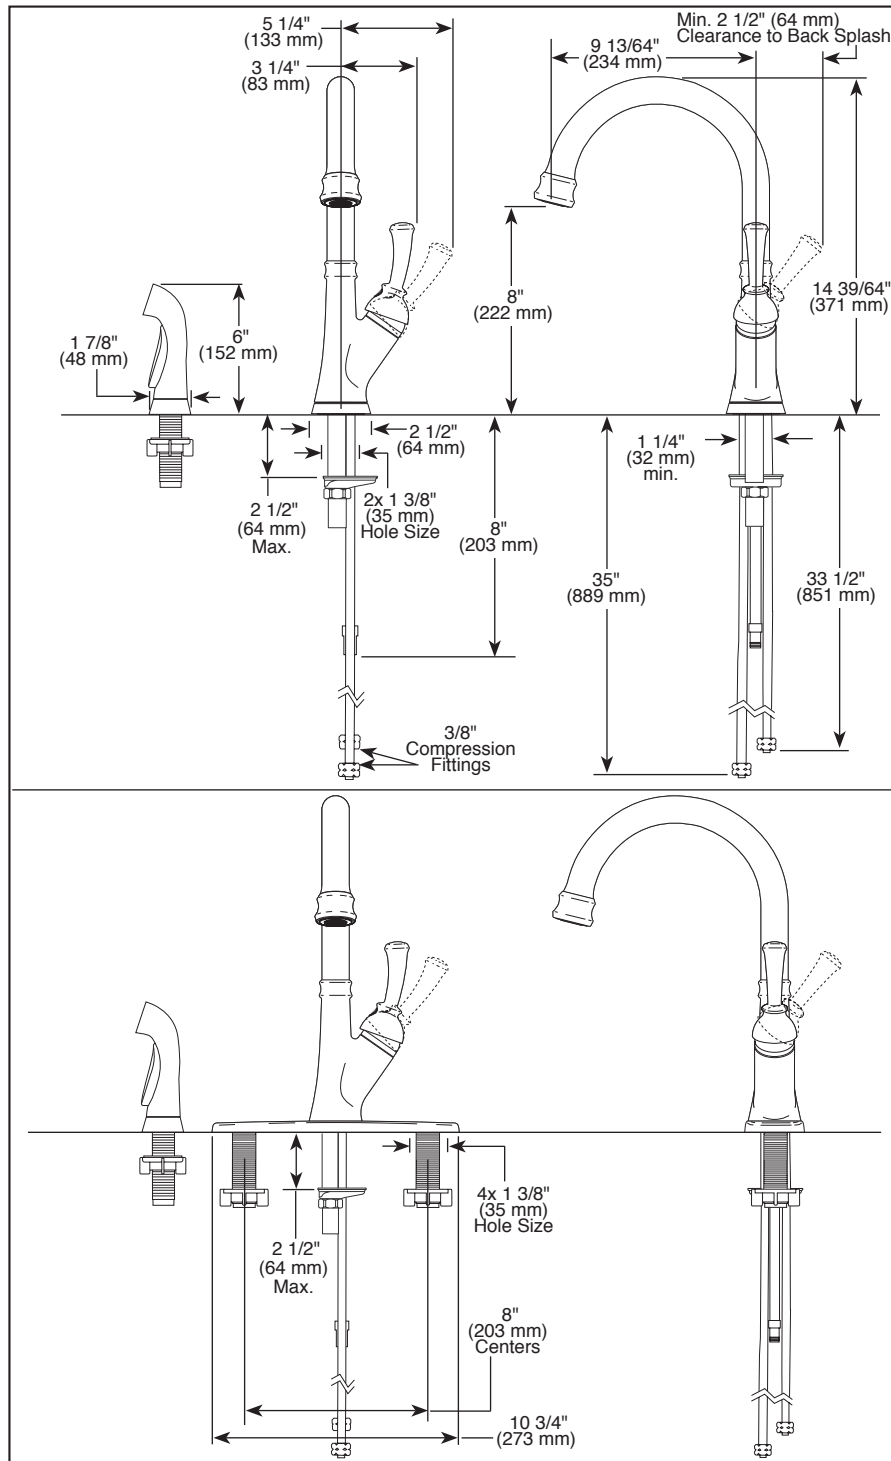

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-11949-DST Rev. C



KITCHEN FAUCETS

- Savile™ Collection
- Single Handle Deck Mount
- 1,2,3, or 4 Hole Sink Applications
- DIAMOND Seal® Technology
- Quick Snap® Hose Installation

STANDARD SPECIFICATIONS:

- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa.
- 3/8" O.D. straight, staggered pex supply tubes - 35" (889 mm) and 36" (914 mm) long.
- 9 13/64" (234 mm) long, 14 39/64" (371 mm) high spout swings 180°.
- Quick Snap® hose installation.
- Vegetable sprayer with matching finish sprayhead - 45" (1143 mm) long hose.
- Recommended hole sizes 1 3/8" (35 mm) on 4" (102 mm) centers.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Contol mechanism is a diamond coated ceramic cartridge.
- Spray attachment has anti-siphon device as integral part of valve.
- Centermount or 8" (203 mm) centers with 10 3/4" (273 mm) escutcheon.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2015 Masco Corporation of Indiana