

## KITCHEN FAUCETS

- Hi Arc Pull-Down
- Single Handle Deck Mount
- 2 or 4 Hole Sink Applications
- Soap Dispenser
- Diamond Seal® Technology
- Integrated Supply Tubes

### STANDARD SPECIFICATIONS:

- Centermount or 8" (203 mm) centers with 10" (254 mm) escutcheon.
- 12 39/64" (320 mm) high, 10 39/64" (269 mm) long, spout swings 360°.
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- Control shall return to neutral position when faucet is turned off.
- Touch-Clean® 2 function (stream/spray) sprayhead.
- Quick Snap® connect hoses.
- Pull-down wand operates in an aerated or spray mode via an ergonomic toggle diverter.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Integral hose lead to aid installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring and 10" (254 mm) escutcheon to help alignment and aid installation.
- Recommended hole size 1 5/16" (33 mm) on 4" (102 mm) centers.
- 3/8" O.D. straight, staggered PEX supply tubes, 33 1/2" (851 mm) and 35" (889 mm).

## WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.


**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6



Indicates compliance to  
ICC/ANSI A117.1

- Verified compliant with .25% weighted average Pb content regulations.

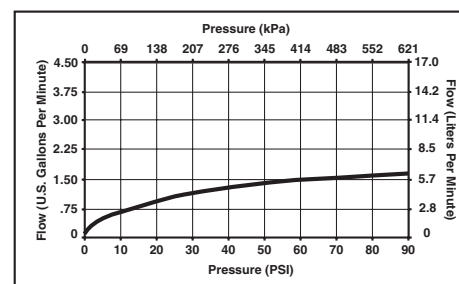

55 E. 111th Street, Indianapolis, Indiana 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2011 Masco Corporation of Indiana