


LAVATORY FAUCET

- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

Submitted Model No.: _____

Specific Features: _____

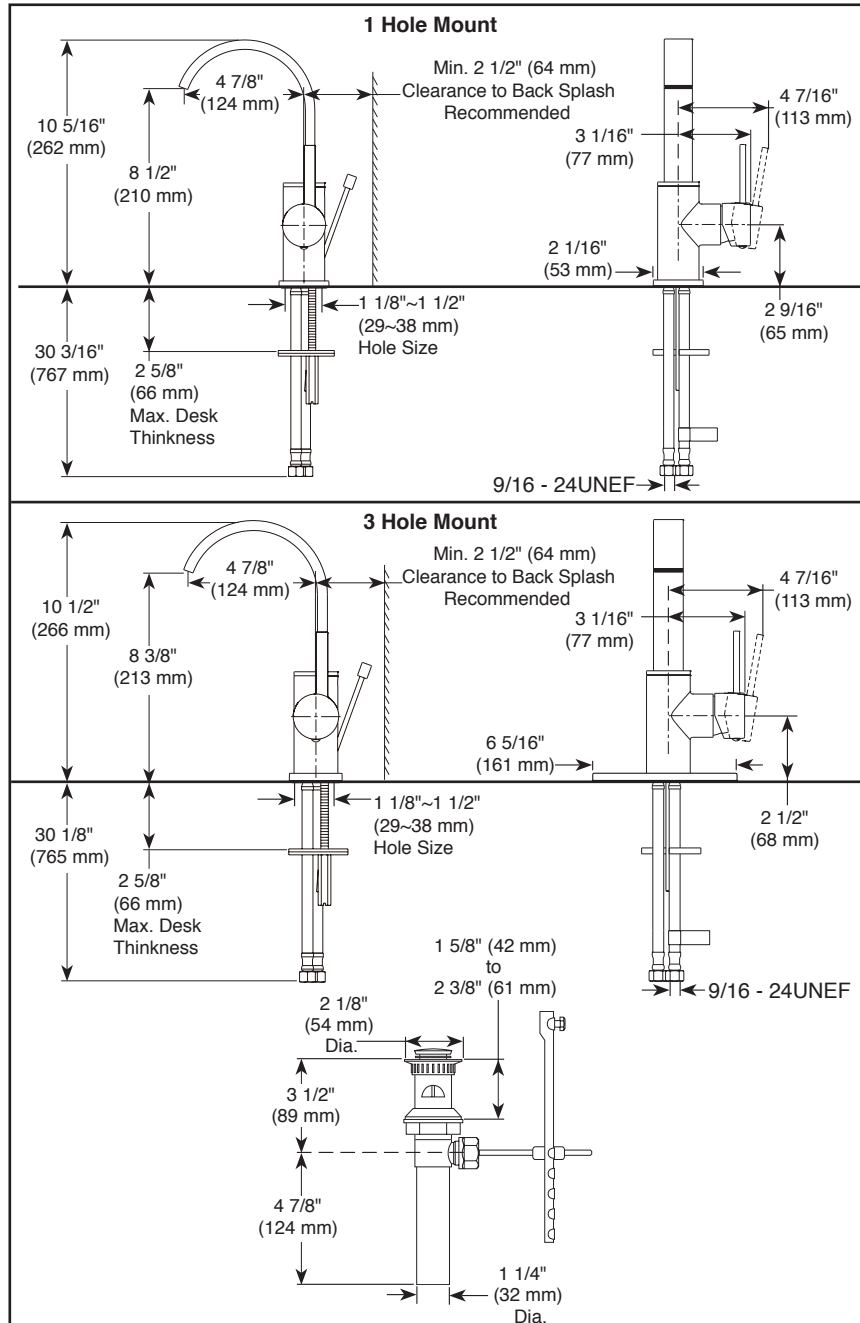

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-15630LF Rev. C

STANDARD SPECIFICATIONS:

- Solid brass casted body.
- Single handle lavatory deck faucets for exposed mounting on 1 or 3 hole sinks.
- 4 7/8" (124 mm) long spout.
- Centermount or 4" (102 mm) centers with optional 6 5/16" (161 mm) escutcheon.
- Polymer braided flexible supply hose with 9/16 - 24 UNEF thread connection
- Lever handle. Control mechanism is replaceable cartridge with ceramic plates.
- Maximum 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Models have drain with pop-up type fitting with plated flange and stopper.
- Spout swings 360°.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or, for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2



Indicates compliance to ICC / ANSI A117.1

- EPA WaterSense®

Verified compliant with 0.25% weighted average Pb content regulations



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2015 Masco Corporation of Indiana