


Submitted Model No.:\_\_\_\_\_\_\_Specific Features:\_\_\_\_\_\_



## ▲ Designate Proper Finish Suffix

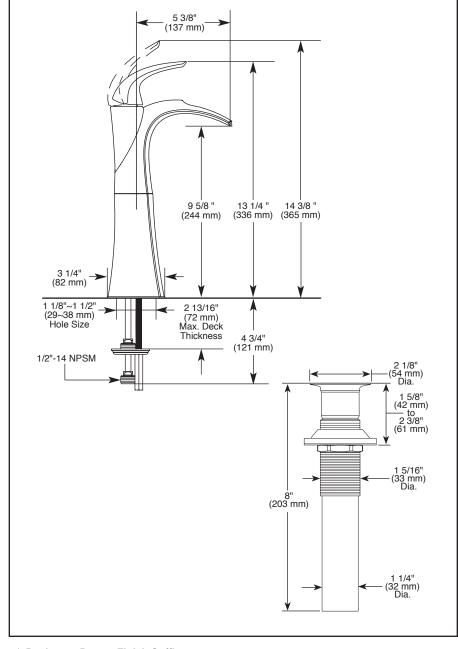

# LAVATORY FAUCET

- Single Handle Deck Mount
- Single Hole Sink Applications
- Single Hole Riser Model

#### **STANDARD SPECIFICATIONS:**

- Maximum flow rate 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa.
- Solid brass fabricated body.
- Single handle lavatory deck faucet for exposed mounting on single hole sink.
- 5 3/8" (137 mm) long spout.
- Lever handle. Control mechanism is replaceable cartridge with ceramic plates.
- 1/2" 14 NPSM adapters.
- Grid strainer without overflow holes.

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2

Indicates compliance to ICC/ANSI A1 17.1

- EPA WaterSense<sup>®</sup>
- Verified compliant with 0.25% weighted average Pb content regulations.

