



Submitted Model No.:

Specific Features:



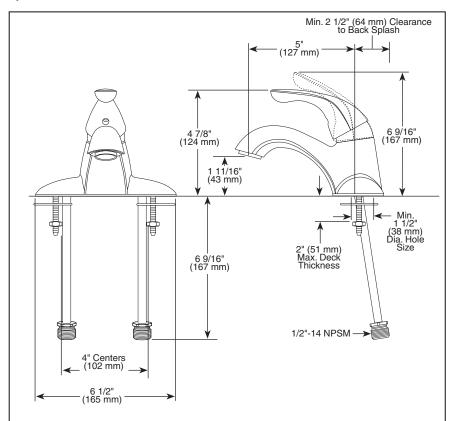

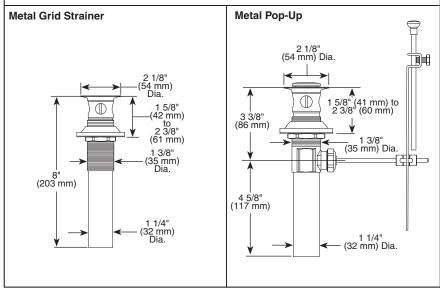

LAVATORY **FAUCETS**

- Single Handle
- 2 and 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Single handle lavatory deck faucets (for exposed mounting on two and three hole sinks).
- 4" (102 mm) centerset.
- Solid brass fabricated body.
- 5" (127 mm) spout.
- Vandal resistant lever handle. Red/blue colored graphics indicate hot/cold temperature.
- Control mechanism is the diamond embedded ceramic disc cartridge.
- Control handle shall return to the neutral position when valve is turned off.
- Adjustable handle limit stop.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Models have 1/4" threaded mounting studs.
- Available options for field conversion: 6" (152 mm) long elbow handle-red/blue colored graphics indicate hot/cold temperature. Order RP54687.
- Vandal resistant aerator or spray outlet.
- Metal grid strainer (523)
- Metal pop-up drain (520).
- Lift rod hole (520).
- Maximum 1.50 qpm @ 60 psi, 5.7 L/min @ 414 kPa. HGM (models only) max. 0.5 gpm @ 60 psi, 1.9 L/min @

TGM (models only) max. 0.35 gpm @ 60 psi, 1.3 L/min @ 414 kPa.


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2

- Indicates compliance to ICC/ANSI A117.1
 EPA WaterSense® ◆=Only models as indicated
- Verified compliant with .25% weighted average Pb content regulations.





55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2015 Masco Corporation of Indiana