



**Submitted Model No.:** 

**Specific Features:** 



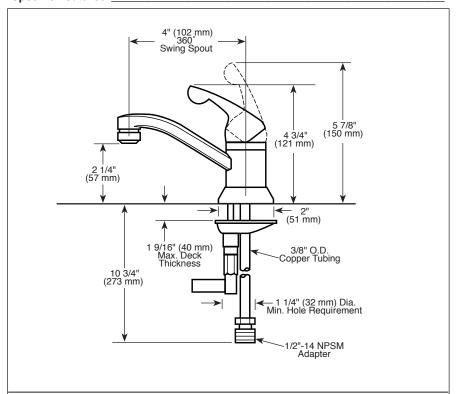

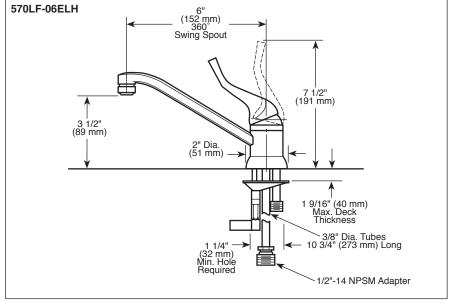

- FAUCETS

  Single Handle Deck Mount
- Single Hole Sink Applications

## **STANDARD SPECIFICATIONS:**

- Solid brass fabricated body.
- 4" (102 mm) spout swings 360°.
- Control handle shall return to neutral position when faucet is turned off.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Models have 3/8" O.D. copper supply tubes -10 3/4 (273 mm) long.
- Models supplied with 1/2"-14 NPSM adapters.
- Maximum 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
  Indicates compliance to
  ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

