


Submitted Model No.: \_\_\_\_\_  
 Specific Features: \_\_\_\_\_

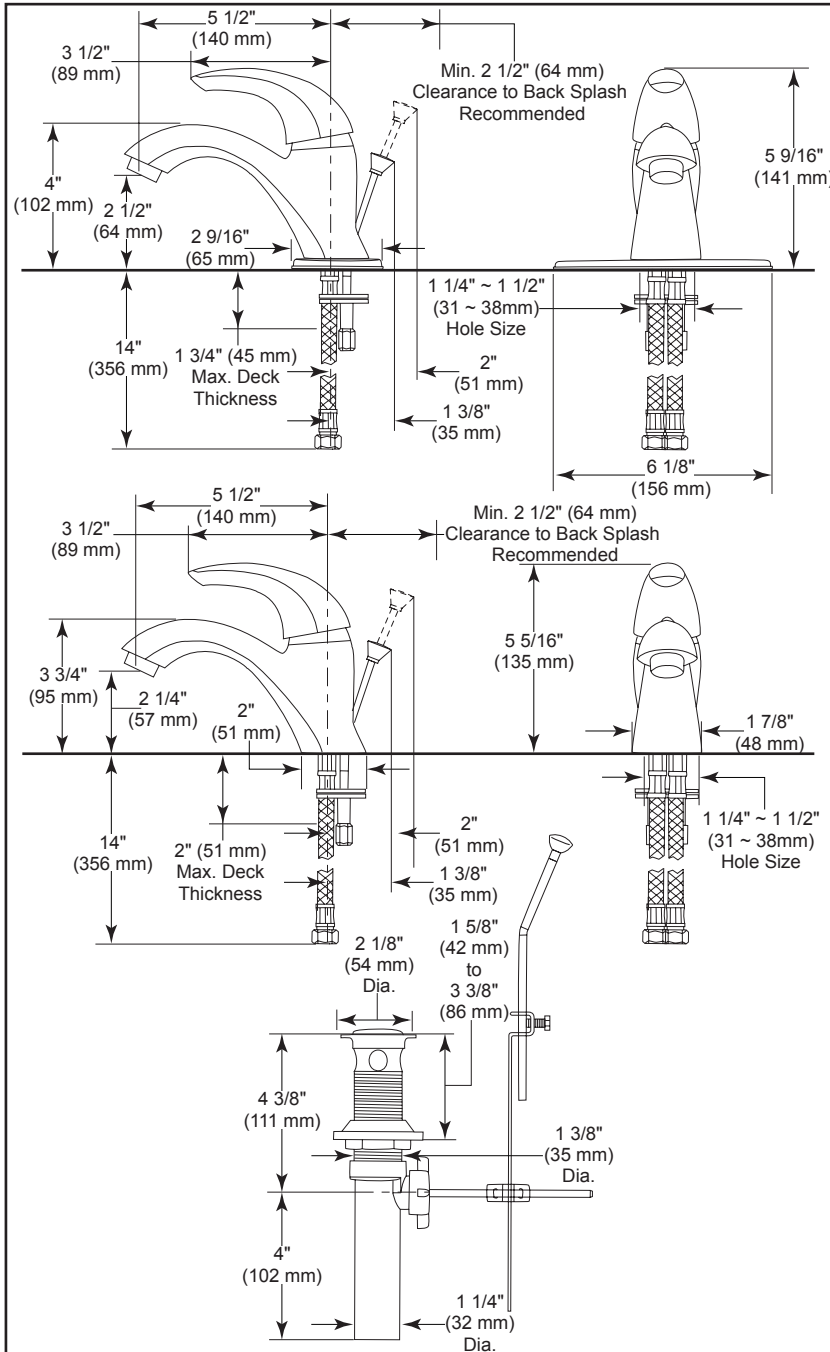

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-L-583LF Rev. B



## LAVATORY FAUCETS

- C-Spout Series
- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications
- 4" Centerset

### STANDARD SPECIFICATIONS:


- Maximum flow rate 1.5 gpm @ 60 PSI, 5.7 L/min @ 414 kPa.
- 4" (102 mm) centerset.
- Ceramic cartridge with high temperature rotational limit stop.
- 1 or 3 hole installation.
- 5 1/2" (140 mm) long rigid spout.
- Maximum 1 3/4" (45 mm) deck thickness.
- Colour coded plug button on handle for hot/cold identification.
- Handle 3 1/2" (89 mm) lever handle - ADA compliant - color indexed.
- 50/50 pop-up has metal flange with plastic drain.
- 14" (356 mm) flexible supplies with 3/8" compression fittings.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
-  Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with 0.25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280  
 350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1  
 © 2015 Masco Corporation of Indiana