


**Submitted Model No.:** 

Specific Features:

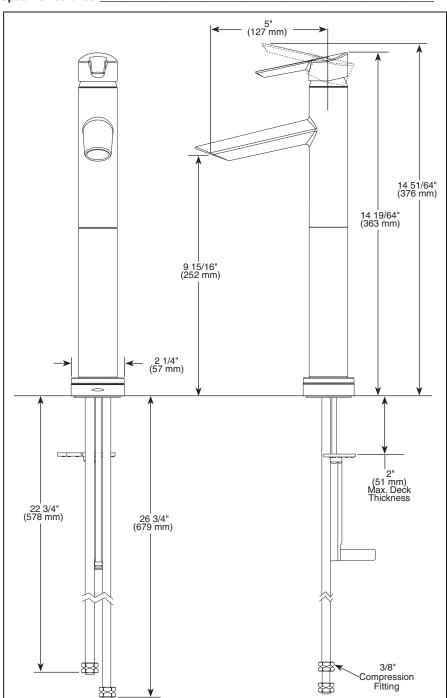

#### ▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



# LAVATORY **FAUCETS**

- Compel<sup>®</sup> Collection
  DIAMOND Seal<sup>®</sup> Technology
- Single Handle Deck Mount
- 1 Hole Mount
- 6 1/4" Riser
- Touch<sub>2</sub>0.<sub>xt</sub>® Technology

## STANDARD SPECIFICATIONS:

- Single handle lavatory deck faucet.
- 1 hole mount.
- Lever handle. Control mechanism is the diamond embedded ceramic disc cartridge.
- 5" (127 mm) long spout.
- 1 1/8" monimum 1 1/2 maximum hole size.
- Red/blue markings on handle for hot/cold identification.
- Handle motion "Euro Style".
- Models have 3/8" O.D. PEX supply tubes straight/ staggered 22 3/4" and 26 3/4" long.
- Maximum 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Delta Touch<sub>2</sub>O<sub>xt</sub><sup>™</sup> Technology offers both touch and proximity sensing technology to control water flow.
- Red/Blue indicator light signals on-off, water temperature and when batteries run low.
- Uses 6 AA batteries (included) or 6 C (optional) batteries.
- Optional 120V AC adapter available (3 prong grounded outlet required).

### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2015 Masco Corporation of Indiana