



# Prelude<sup>™</sup> TOILET C41201 ▲

Technical Information	
Fixture configuration	Two-piece, round bowl
Water per flush	1.28 gpf (4.8 lpf)
Passageway	2" (51mm)
Water area	8 31/32"X 6 21/32" (228mm x169 mm)
Water depth from rim	7 7/32" (183 mm)
Seat post hole centers	5 1/2" (140mm)
Included Components:	
Bowl	RP71185▲
Tank	RP71179▲
Tank Cover	RP71180 ▲
Trip Lever	RP71165▲
Mounting Hardware – Bowl to floor	RP71146
Mounting Hardware – Tank to bowl	RP72471
Seat Assembly	RP71196▲

#### **Installation Notes**

• Install this product according to the installation guide.

▲ Designate proper finish suffix (-WH for white)

- This model complies with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act, which includes the installation of an open front seat (not included).
- This model complies with CSA B651 when installed per Clause 4.3.6 of the standard.

## STANDARD SPECIFICATIONS

- Vitreous China.
- 27 1/16" (687mm) in length, 16 13/16" (427mm) in width, 32 15/16 "(837mm) in height.
- Single/High Efficiency Toilet (HET) flush system.
- Round bowl with comfort chair height design (17"top of seat).
- ■12" (305 mm) rough-in.
- High efficiency 1.28 gpf (4.8 lpf).
- 3" flush valve.
- 2" (51mm) fully glazed trapway.
- Includes polished chrome trip lever.
- Includes toilet seat.
- 1,000g MaP score at 1.28 gpf.

#### **LIMITED WARRANTY**

- Chinaware parts warranted to original consumer purchaser.
- 5 year warranty on mechanical components, fill valve, flush valve, flush lever handle, and mounting bolts will apply.
- The toilet seat & lid will have a 1 year warranty.



### **COMPLIES WITH**

- ADA
- ASME A112.19.2 / CSA B45.1
- ASME A112.19.5
- ICC / ANSI A117.1
- EPA WaterSense® High Efficiency Toilet
- CalGreen








# Prelude<sup>™</sup> TOILET C41201 ▲

■ Round Bowl

<b>Submitted Model No.:</b>	
Specific Features	

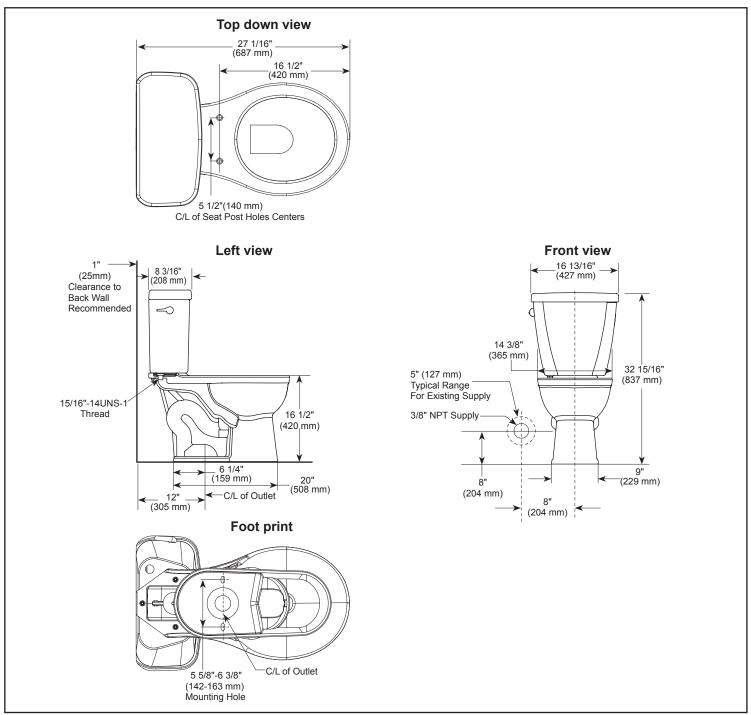

# ▲ Designate proper finish suffix (-WH for white)