

Electronic Faucets

Electronic Control Box for E-Lav Faucets - Rough-In ONLY with Thermostatic Mix Valve

Model No: ELAVT0008RI

COMPLIES WITH:

- CSA certified to B125.3 and NSF61 Section 9
- Verified compliant with .25% weighted average Pb content regulations
- Thermostatic valve is IAPMO listed to ASSE 1070
- (Contact Delta Representative for State and/or Local Approvals)



NOTES:

Verified to <0.25% Pb average wetted surface regulations

SPECIFICATION:


- Control Box Rough-In
- For recessed wall mounting
- 10" square metal box with cover
- Factory assembled waterway components with stops
- Hot and Cold inlet supplies
- Point of use thermostatic mixing valve
- · Integral check valves in hot and cold inlets to prevent crossflow
- Outlet temperature range 95-120°F (35-49°C)
- Maximum flow 5.8 gpm (22L/min) @ 45 psi pressure loss, minimum flow 0.35 gpm (1.3 L/min)
- · Outlet flow reduced to a trickle in the event of a cold water supply failure

OPERATION:

• Designed for routine 10 minute 180°F (82°C) disinfection cycles

(Dimensional drawing on following page)



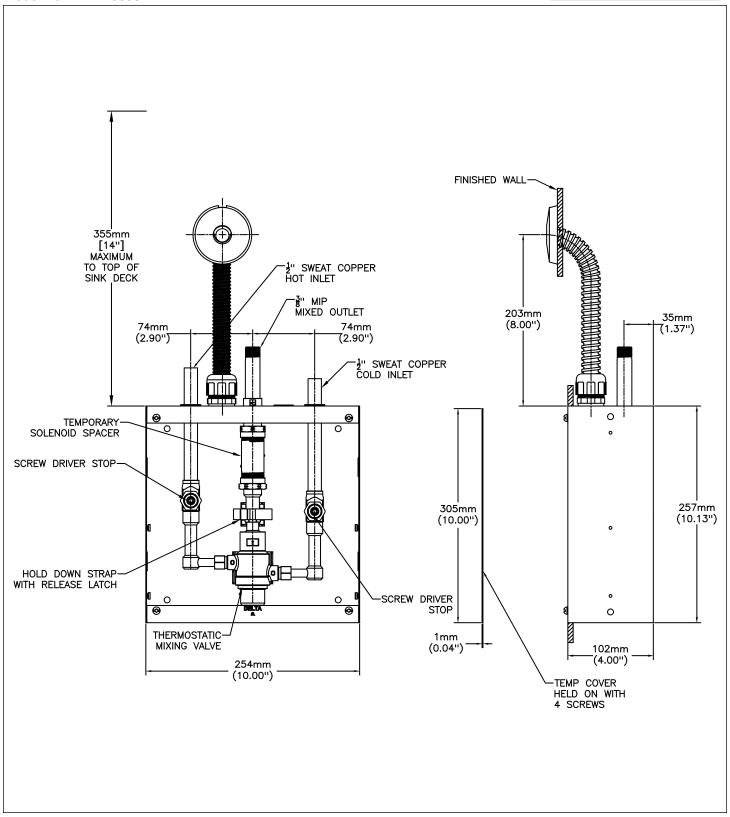

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 12, 2013.