




Productspecificaties

- Handdouche drievoudig verstelbaar met antikalksysteem
- Doucheslang 3/8" x 1/2" x 1750 mm met draaibare conusmoer
- Hartafstand 800 mm
- Glijstang met glijstuk
- Doorstroomhoeveelheid max. 7,6 l/min

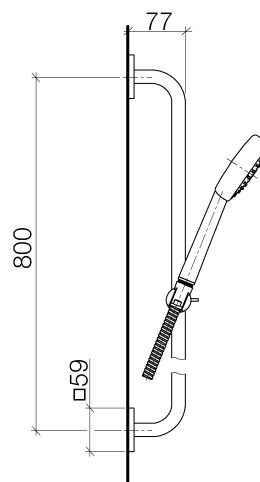

Oppervlakken

- chroom 26403720-00

This exploded view diagram illustrates the components of a shower assembly. The diagram is divided into two main sections by a vertical line. On the left, a shower head (1) is shown above a shower arm (2). On the right, a shower head (1) is shown above a shower arm (2). A bracket (3) is shown on the left, indicating the mounting area. The diagram shows the assembly sequence for the shower head and arm, including the shower head, shower arm, and mounting bracket.

Bestelhoeveelheid

Nr.	Artikelnummer	Omschrijving	Installatiehoeveelheid
1	28014979ff	douche	1
3	28322970ff	slang	1
3	26701720ff	douchegarnituur	1

Debietdiagram

