



DXV MODULUS™

MONOLITH ELONGATED TOILET



D22020A100.415

FEATURES

- Modern elongated bowl design
- Slim high back tank
- Right Height® rim at 16-1/2" (419 mm) for accessible application
- High efficiency 1.28 gpf / 4.8 Lpf single flush with actuator
- 12" (305 mm) rough-in
- Made of vitreous china
- Duroplast™ slow-close seat included
- Removable panels for concealed install

DIMENSIONS

NOMINAL DIMENSIONS

28-5/8" x 15-1/2" x 31" (727 x 395 x 785 mm)

WATER SPOT

7-7/8" (200 mm) wide

9-1/4" (235 mm) length

5-1/2" (140 mm) distance to rim

COLORS/FINISHES

Canvas White (415)

COMPONENTS

5026A15G.415 Elongated Toilet Seat

735217-400.415 Tank Cover

7381909-200.XXX0A Single Flush Actuator
Polished Chrome (0020A)
Polished Nickel (0080A)
Brushed Nickel (2950A)
Matte Black (2430A)

COMPLIANCE CERTIFICATIONS


Meets or Exceeds ASME A112.19.2/CSA B45.1

ROUGH IN DIAGRAM SHOWN
ON NEXT PAGE



DXV MODULUS™

MONOLITH ELONGATED TOILET

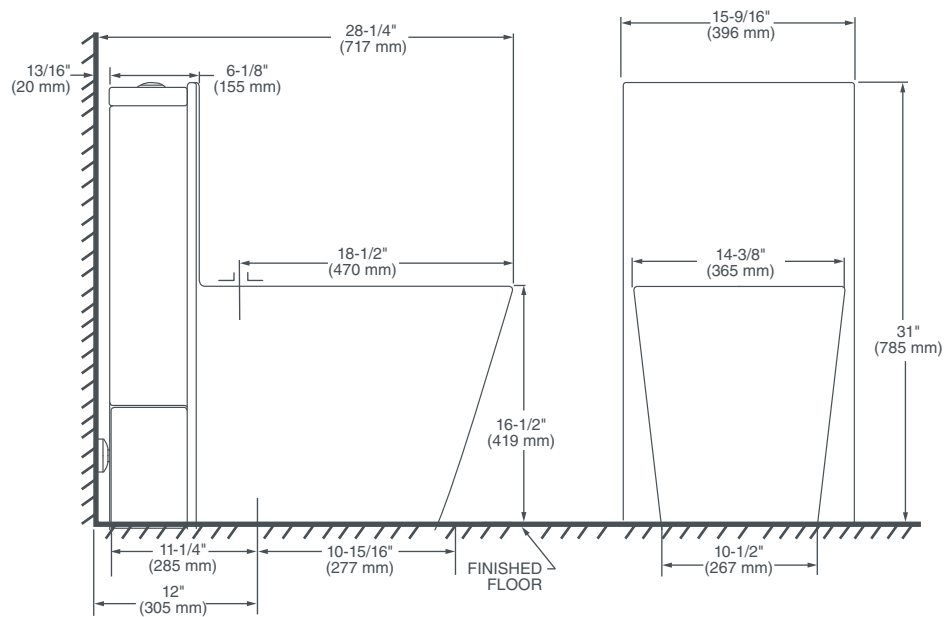

IMPORTANT:

Water supply on the wall is required at 3-3/4" or 9" from centerline of the toilet (see rough-in).

First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation.

NOTES:

This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet.

Supply not included with fixture and must be ordered separately.

* Dimensions shown for location of supply is suggested.

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL