



# COSSU™

## ONE-PIECE ELONGATED TOILET



### D22015F102.415 - Right-Hand Trip Lever

#### FEATURES

---

- Elongated bowl contemporary design
- Made of vitreous china
- High efficiency (1.28 gpf/4.8 Lpf)
- 2" fully-glazed concealed trapway
- Right Height®
- Durable, slow-close seat made from polypropylene plastic
- Siphon action jetted bowl - 1,000 MaP
- PowerWash® rim scrubs bowl with each flush
- EverClean® surface inhibits the growth of stain and odor causing bacteria, mold and mildew on the surface
- 3" flush valve with chemical resistant flapper
- 12" (305 mm) rough-in
- 16-1/2" (419 mm) rim height for accessible applications

#### DIMENSIONS

---

##### NOMINAL DIMENSIONS

28-1/4" x 14-1/2" x 30-3/4" (717 x 366 x 782 mm)

##### WATER SPOT

8-1/4" (210 mm) wide

9-1/4" (235 mm) length

5-1/2" (140 mm) distance to rim

#### COLORS/FINISHES

---

Canvas White (415)

#### COMPONENTS

---

5020A15G.415 Toilet Seat

Elongated, Slow-Close, Top Mount, Easy Lift Off

735192-400.415 Tank Cover

7381846-200-XXX0A Plated Trip lever (optional component)

Satin Nickel (295)

Polished Nickel (008)

#### COMPLIANCE CERTIFICATIONS

---

Meets or Exceeds ASME A112.19.2/CSA B45.

Includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions


ROUGH IN DIAGRAM SHOWN  
ON NEXT PAGE



Meets the Americans with Disabilities Act Guidelines  
and ANSI A117.1 Requirements for Accessible and  
Usable Building Facilities-Check Local Codes

# COSSU™

## ONE-PIECE ELONGATED TOILET

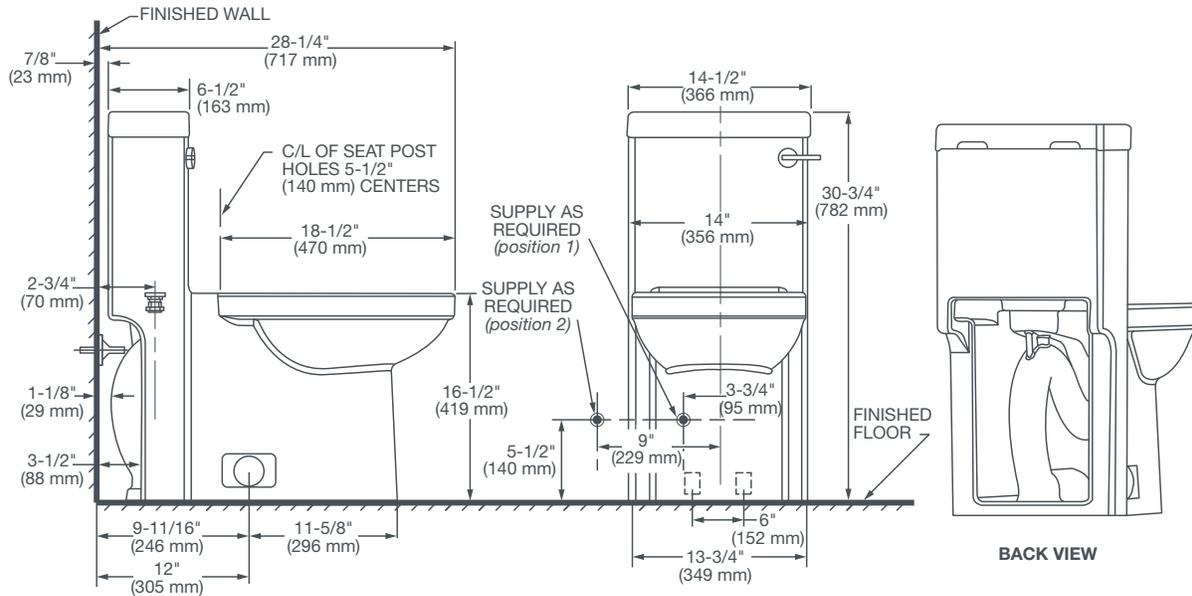

**IMPORTANT:**

Water supply on the wall is required at 3-3/4" or 9" from centerline of the toilet (see rough-in).

First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation.

The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 3-1/4". In this case, check your supply and hose dimensions.

**NOTES:**

This toilet is designed to rough-in at a minimum dimension of 12" (305mm) from finished wall to C/L of outlet.

Supply not included with fixture and must be ordered separately.

\* Dimensions shown for location of supply is suggested.

**IMPORTANT:**

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.