

GENERAL

Good quality sink bowl seamlessly formed of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depth: 6-1/8" (156mm).

Coved Corners: 2-1/4" (57mm) vertical and horizontal radius. Rim Height: 3/16" (5mm) below outside edge of sink. Finish: Exposed surfaces are polished to Brushed Satin

Underside: Fully undercoated to reduce condensation and dampen sound.

Drain Opening: 2" (51mm)

Sink complies with ASME A112.19.3-2008 / CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code and the National Plumbing Code of Canada.



These sinks are compliant to ADA and ANSI/ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.

OPTIONAL ACCESSORIES


Cutting Board: CB912

Drain: LK36

SINK DIMENSIONS*

U-Channel Model	Overall		Inside Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Coners		Minimum Cabinet Size
Number	L	W	L	W	D	L	W	
BCFR1315	13 (330mm)	15 (381mm)	10 (254mm)	12 (305mm)	6-1/8 (156mm)	12-3/8 (314mm)	14-3/8 (365mm)	18 (457mm)


^{*}Length is left to right. Width is front to back.

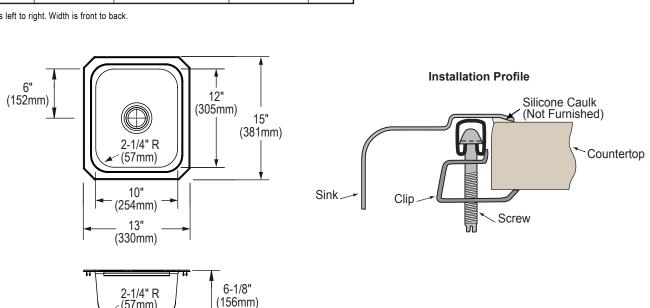

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

(57mm)

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not



Model BCFR1315



Elkay www.elkayusa.com

2222 Camden Court Oak Brook, IL 60523