

ELKAY[®]

SPECIFICATIONS

**Gourmet Sink
with Perfect Drain™
Models LR2522PD**

GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel with **Perfect Drain**. Top mount.

DESIGN FEATURES


Bowl Depth: 8-1/8" (203mm), Overall 9-5/8" (244mm)

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Rim Height: 3/8" (10mm)

Finish: Exposed surfaces are hand polished to a Lustrous Highlighted Satin finish.

Underside: Fully protected by Sound Guard[®] undercoating to reduce condensation and dampen sound.

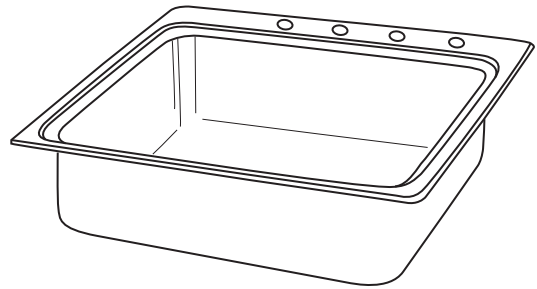

Model LR2522PD4

Perfect Drain: Seamlessly welded stainless steel collar eliminates the gap between a traditional drain and the sink for a sanitary and gap free installation. Each sink shipped with one LKPD1 drain kit, or a garbage disposer can be installed for user convenience.

Patent Pending

OTHER

Drain opening: 3-3/8" (86mm)

Waste Fitting complies with ASME A112.18.2/CAN/CSA-B125.2

Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO[®] as meeting the applicable requirements of the Uniform Plumbing Code[®], International Plumbing Code[®], and National Plumbing Code of Canada.



OPTIONAL ACCESSORIES



Bottom Grids: LKWBG2115SS

Cutting Boards: CB1516

Rinsing Baskets: LKWRB2115SS, LKWERBSS

Utensil Caddy for Rinsing Basket: LKWUCSS

Installation Profile

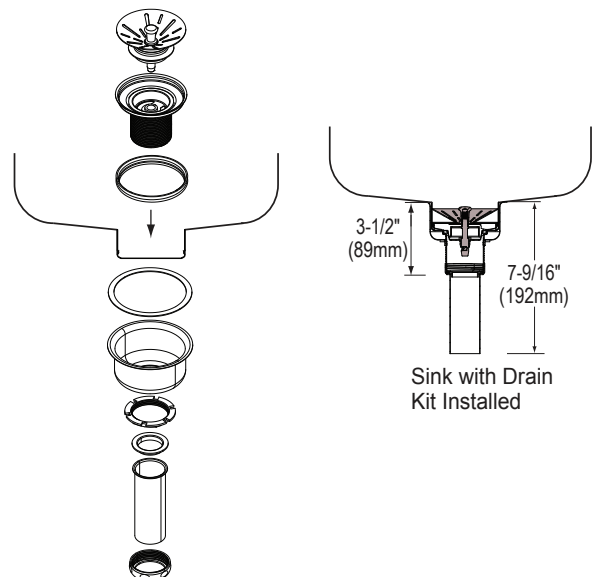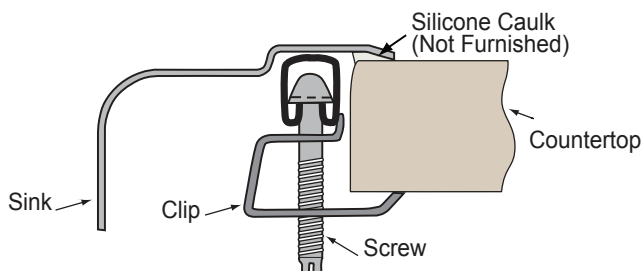

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.

ELKAY[®]

SPECIFICATIONS

**Gourmet Sink
with Perfect Drain[™]
Models LR2522PD**

SINK DIMENSIONS*


Model Number	Overall			Inside Bowl			Cutout in Countertop (1-1/2" (38mm) Radius Corners)	No. of 1 1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
	L	W	D	L	W	D			
LR2522PD	25 (635mm)	22 (559mm)	9-5/8 (244mm)	21 (533mm)	15-3/4 (400mm)	8-1/8 (206mm)	24-3/8 (619mm) 21-3/8 (543mm)	1, 2, MR2, 3, 4, or 5	30 (762mm)

*Length is left to right. Width is front to back.

in sink erator[®]


Elkay[®] Perfect Drain[™] sinks are designed and approved for compatible disposers manufactured by InSinkErator[®] utilizing the Quick Lock[®] mounting configuration. Use of non-approved disposers may void Elkay warranty.

InSinkErator, Quick Lock and the mounting collar configuration are trademarks of Emerson Electric Co.

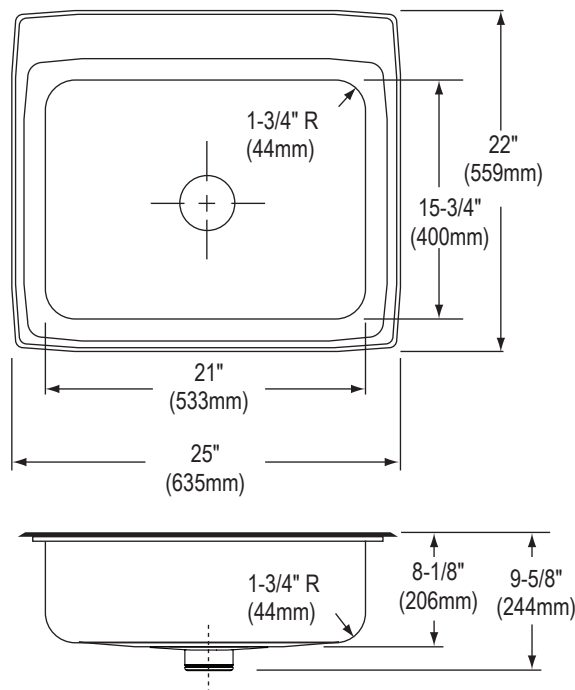

Hole Drilling Configurations

1-1/2" (38mm) Diameter Faucet Holes on 4" (102mm) Centers

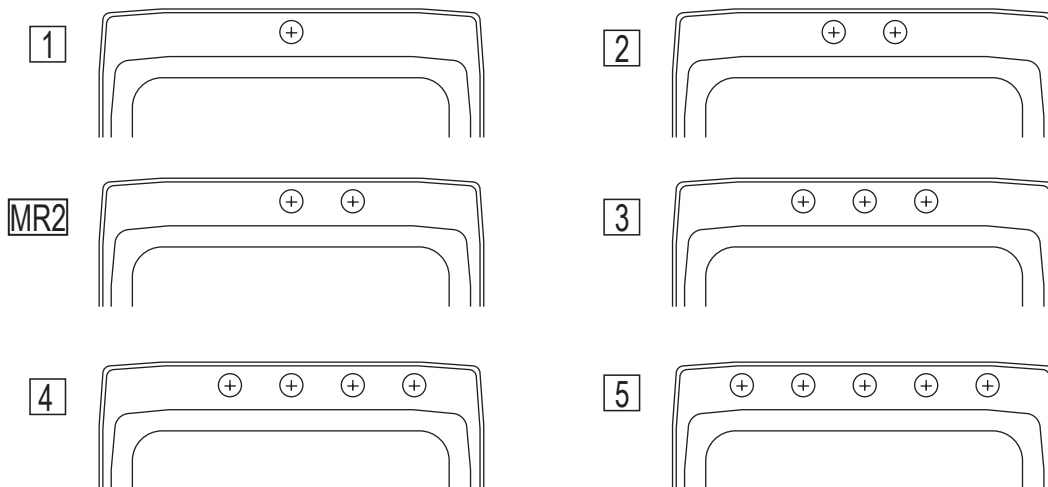

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.