

ELKAY® SPECIFICATIONS

Pacemaker® Single Bowl Classroom Sinks and Sink Packages – Double Ledge Models PSDKR2517, PSDKRQ2517, PSDKAD2517 and PSDKADQ2517 Series – A.D.A. Compliant

GENERAL

Fine quality sink bowl is seamlessly drawn of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Top Mount.

OTHER

Drain Opening: 3-1/2" (89mm)

Slotted hole allows for vandal-resistant faucet or bubbler.

NOTE: Unless otherwise specified, sink is furnished with 2 faucet holes as shown (see back page).


Sink complies with ASME A112.19.3/ CSA B45.4



Sinks are listed by IAPMO® as meeting the applicable requirements of the Uniform Plumbing Code®, International Plumbing Code®, and National Plumbing Code of Canada.



Both the faucet and the bubbler are classified by Underwriters Laboratories Inc. to NSF/ANSI61 for residential use.

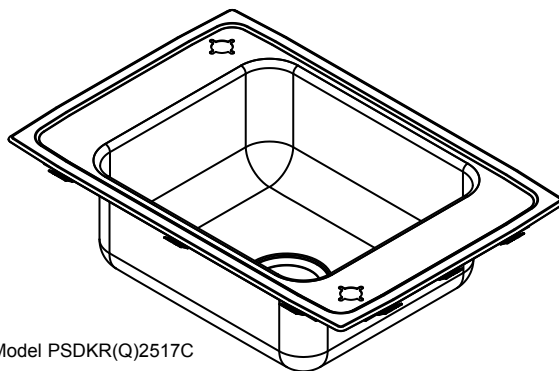

Model PSDKR(Q)2517C

SINK DIMENSIONS (INCHES)*

U-Channel Model Number	Quick-Clip Model Number	Overall		Inside Bowl			Cutout in Countertop (1 1/2" Radius Corners)		No. of Faucet Holes (see back page)	Minimum Cabinet Size	Ship. Wt. Lbs.
		L	W	L	W	D	L	W			
PSDKR2517C	PSDKRQ2517C	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	7 1/8 (181mm)	24 3/8 (619mm)	16 3/8 (416mm)	2	30 (762mm)	23 1/4
PSDKR2517VRC	PSDKRQ2517VRC	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	7 1/8 (181mm)	24 3/8 (619mm)	16 3/8 (416mm)	2	30 (762mm)	23 1/4
†PSDKR2517	†PSDKRQ2517	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	7 1/8 (181mm)	24 3/8 (619mm)	16 3/8 (416mm)	2, 2LM or 4	30 (762mm)	12
PSDKAD2517C	PSDKADQ2517C	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	6 1/2 (165mm)	24 3/8 (619mm)	16 3/8 (416mm)	2	30 (762mm)	23 1/4
PSDKAD2517VRC	PSDKADQ2517VRC	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	6 1/2 (165mm)	24 3/8 (619mm)	16 3/8 (416mm)	2	30 (762mm)	23 1/4
†PSDKAD2517	†PSDKADQ2517	25 (635mm)	17 (431mm)	16 (406mm)	13 1/2 (343mm)	**	24 3/8 (619mm)	16 3/8 (416mm)	2, 2LM or 4	30 (762mm)	12

* Length is left to right. Width is front to back.

** Available in 5-1/2" or 6-1/2" depths. Please consult your sales representative for other depths or modifications.

† Unless otherwise specified, all sinks which do not have suffix "C" are **less fittings** (no faucet, bubbler or drain), but are drilled for faucet, bubbler and drain as illustrated.

CLASSROOM/INSTITUTIONAL SINK PACKAGE

Models PSDKR2517C, PSDKRQ2517C, PSDKAD2517C, and PSDKADQ2517C

(1) LKD208513LC Faucet

(1) LK1141A No Lead Flexi-Guard® Bubbler.


(1) LK35 Duo Strainer.

PSDKR2517VRC, PSDKRQ2517VRC, PSDKAD2517VRC, and PSDKADQ2517VRC Package includes:

(1) LKDVR208513LC Same as LKD208513LC faucet except with handle on left side, and vandal-resistant aerator and handle screw and anti-rotation feature.

(1) LKVR1141A Same as LK1141A except vandal-resistant, with metal bubbler guard and anti-rotation feature.


(1) LKVR18 Drain fitting with vandal-resistant 3" perforated grid strainer.




LK1141A



LKVR18



LK35



LKD208513LC


THIS PRODUCT, AS CONSTRUCTED IS SUBJECT TO INTERPRETATION OF A.D.A. REQUIREMENTS. THE UNOBSTRUCTED KNEE SPACE REQUIRED TO SATISFY A.D.A. STANDARDS MAY NOT BE DESIRABLE.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.


This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.

Pacemaker® Single Bowl Classroom Sinks and Sink Packages – Double Ledge
Models PSDKR2517, PSDKRQ2517, PSDKAD2517
and PSDKADQ2517 Series – A.D.A. Compliant

ELKAY®
SPECIFICATIONS

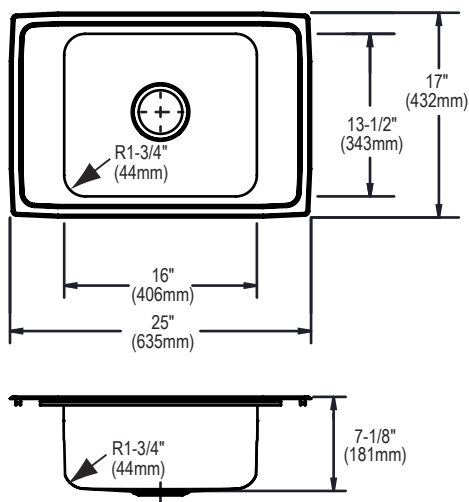

Model PSDKR(Q)2517 Illustrated


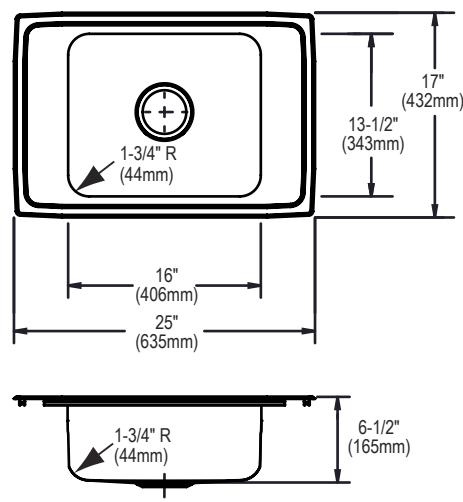


Model PSDKAD(Q)251765C Illustrated

HOLE DRILLING CONFIGURATIONS



2 HOLE CONFIGURATION

U-Channel Type Mounting System

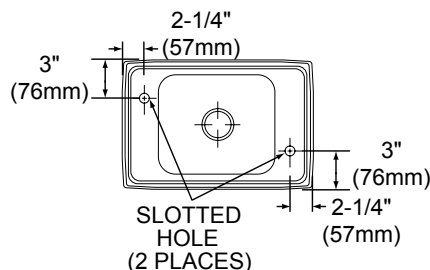
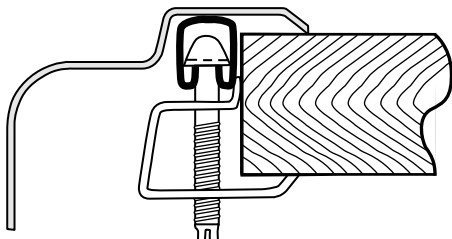


2 LM (LEFT MIDDLE) HOLE CONFIGURATION

Quick-Clip® Mounting System

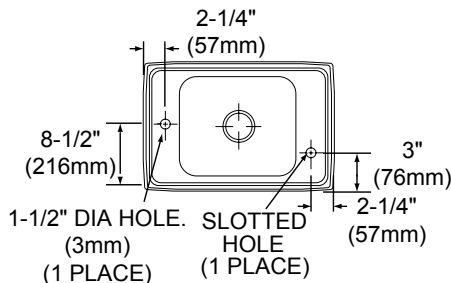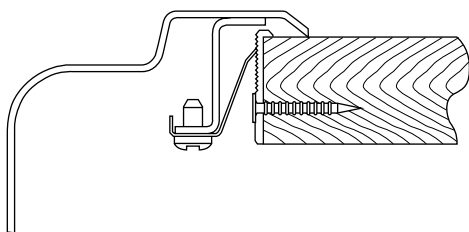

4 HOLE CONFIGURATION

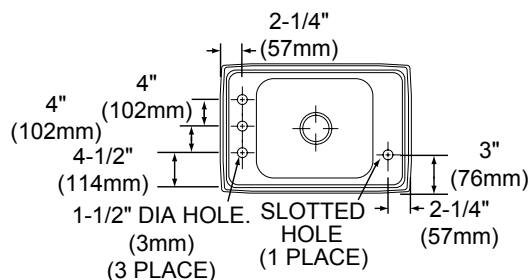

Slotted Hole

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of others producers offerings, be certain these features are not overlooked.