

Manual Instruction

ENGLISH



**Dear Customer**

Thank you for selecting our product. We are confident we can fully satisfy your expectations by offering you a wide range of technologically advanced products which directly result from our many years of experience in faucet and fitting production.

**ATTENTION!**

For care, use soft towel with soap and water only! Under no circumstances should you use any chemicals. For faucets with ORB (oil rubbed bronze) finish please be extra careful not to damage, scuff or ruin the finish during the installation and cleaning!

**AQUA-SENSE G-8220**

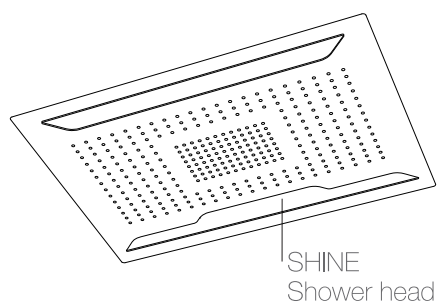


Bracket



LED Cover





Set anchor



Ring



Bolt

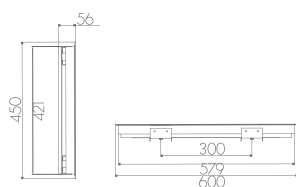

**LED**

Color variation

Mono color(RGB)




Chromo therapy




➔ For assembly you will need:


- wrench,
- level,
- drill,
- ruler,
- silicone,
- teflon tape,
- pencil,
- screwdrivers,
- pipe wrench,
- hacksaw,
- hammer.

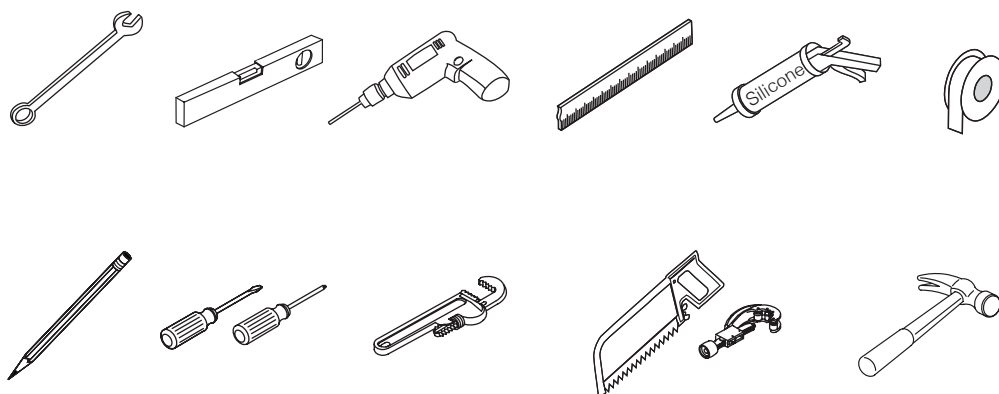


### Installation

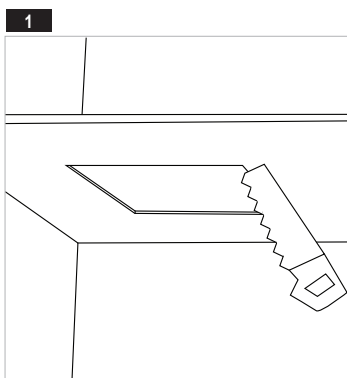


1 Cut the ceiling to install bracket

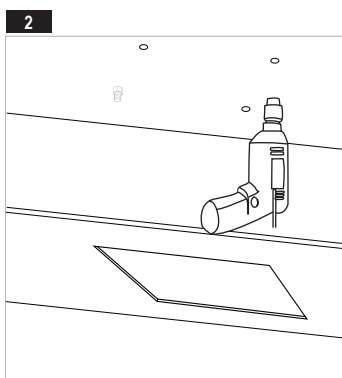


2 Drill the upper ceiling Ø12 for anchor bolts

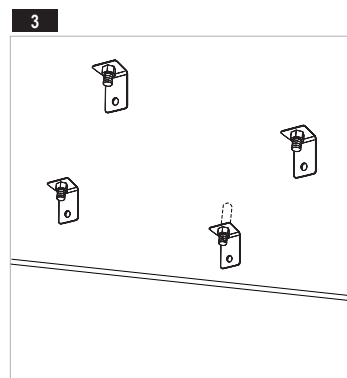


3 Insert the anchor bolts

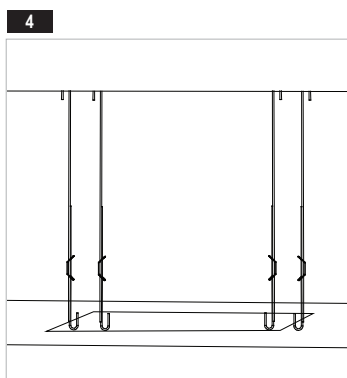


4 Connect rings to the bolts

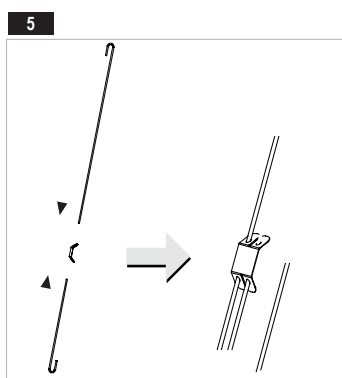


5 Adjust the lengths of rings

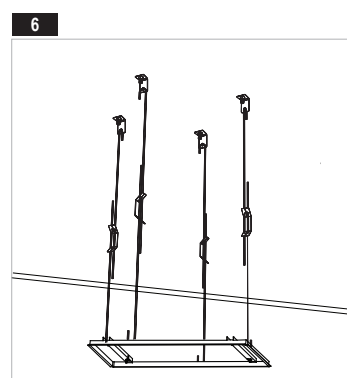


6 Hang the bracket to the rings

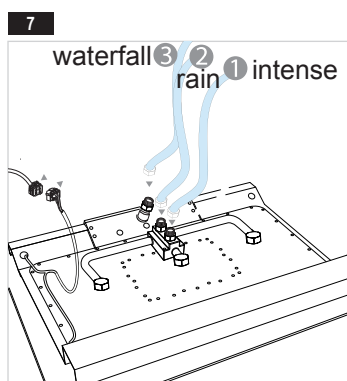

7 Connect water supply hose to the shower head and connect the power

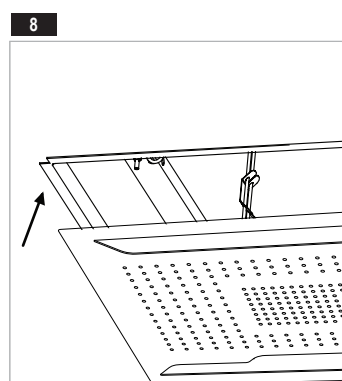


8 Push the shower head to the bracket

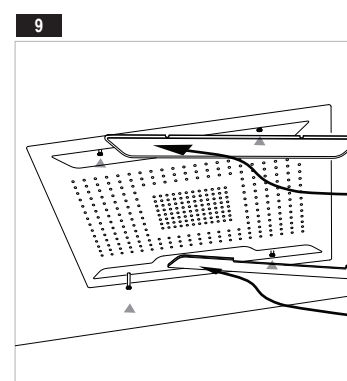

9 Fix the shower head with bolt


Installation

10

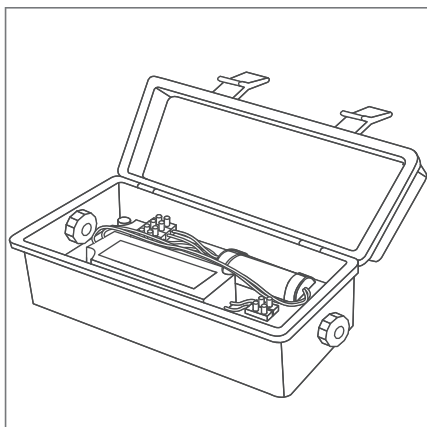


Please open the box

11

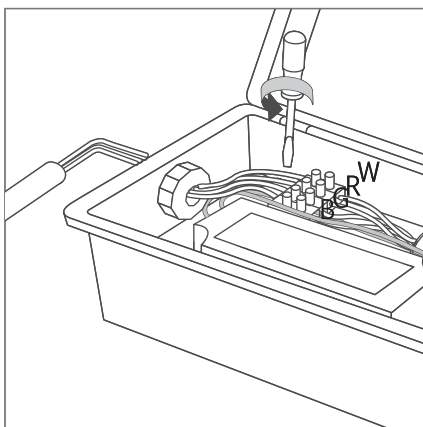


LED line: use the same color  
close the screw from the connector

12

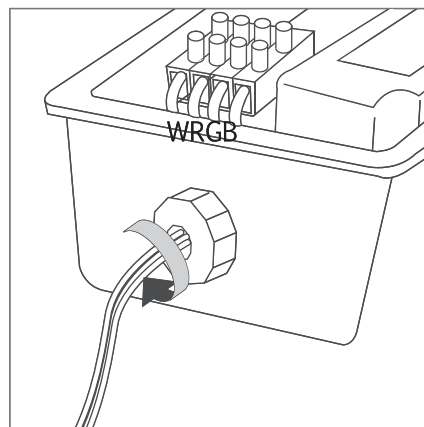


Close the screw for the electric line

13

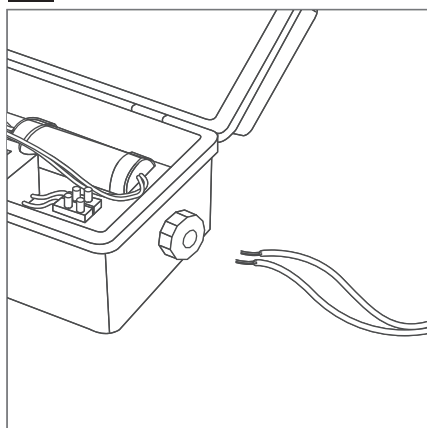


Power line: use the same color

14

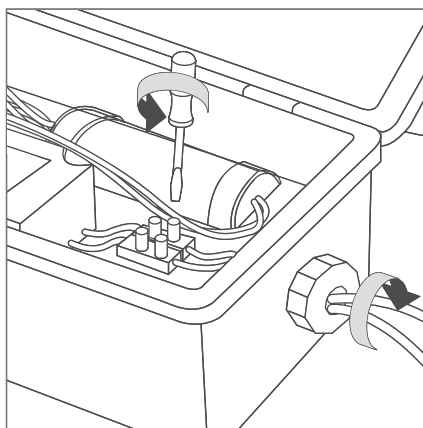


Close the screw from the connector  
and the screw for the line inlet

15

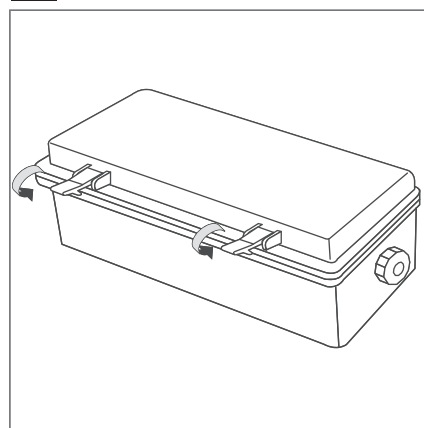

Close the box

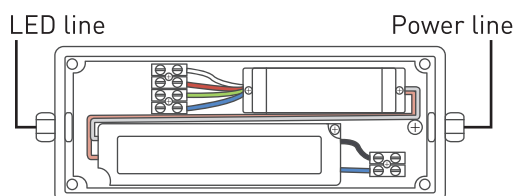

### 3. MIX COLOR SPEED DOWN ■

- Push ■ button to slow down mixing color



- Push Mix for changing mode to Chromo therapy

- The order of color


### 4. MIX COLOR SPEED UP +

- Push + button to speed up mixing color



- Push Mix for changing mode to Chromo therapy

- The order of color

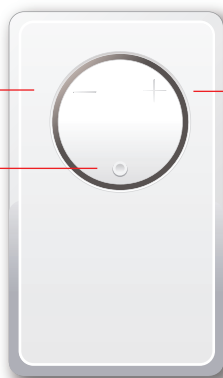

### 1. On/Off


- Push ○ button for about 2 seconds

### 2. Mono changing color(RGB)



- Push button to change color

- Counter clockwise color change



#### → MAINTENANCE

- Clean water guarantees that a mixer equipped with ceramic flow regulators will work correctly, i.e. the water should not contain any impurities such as sand, boiler scale etc. Because of this, the pipe system should be equipped with sieve filters or, if there is no such possibility, with individual cut-off valves with filters designed for such units.
- In the event of increased steering resistance, greater pressure should not be exerted on the handle, as this may cause damage to the flow regulator. In such a situation, the regulator should be removed and cleaned of the dirt and impurities which have accumulated on it.
- The seals should be maintained with vaseline or silicon oil.

#### **Cleaning the outer coating:**

- dirt or stains on the external surfaces of the mixer resulting from scale deposits should be removed by washing the unit with soapy water only. Scale deposits should be dissolved with vinegar then the surface rinsed with clean water and rubbed dry with a soft cloth,
- under no circumstances should the surface of the mixer be cleaned with coarse cloths or cleaning agents containing abrasive materials or acids,
- plastic or lacquered parts must not be cleaned with chemicals containing alcohol, disinfectants or solvents.

#### → GUARANTEE:

The guarantee conditions are contained on a separate sheet.

#### → IN THE EVENT OF A PROBLEM:

e-mail: [graff@graff-mixers.com](mailto:graff@graff-mixers.com)