

EUPHORIA SYSTEM 180


Thermostatic Shower System with tub spout

MODEL # 26177

Pure Freude an Wasser



GROHE America, Inc | 200 North Gary Avenue, Suite G, Roselle, IL 60172
Phone: +1 (800) 444-7643 | Fax: +1 (800) 225-2778 | us-customerservice@grohe.com

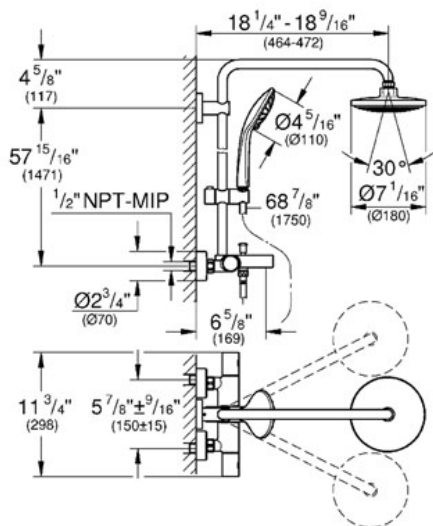

Product Description:

Thermostatic Shower System with tub spout

Standard Specification:

- GROHE EcoJoy® technology for less water and perfect flow
- GROHE StarLight® finish
- GROHE DreamSpray® perfect flow
- $17\frac{3}{4}''$ horizontal swivel shower arm
- Head shower 1 spray (27 492)
- Rain
- Chrome plated spray face
- With ball joint
- Rotation angle $\pm 15^\circ$
- Hand shower 2 sprays (27 238)

Rain, SmartRain

- GROHE SprayDimmer
- Adjustable in height with gliding element
- Max FLOW Rate 2.5 gpm
- SpeedClean anti-lime system
- Rotation cone for Twistfree-function
- Wall installation
- GROHE CoolTouch®
- Exposed thermostatic temperature control with SafeStop® at $100^\circ\text{F} / 38^\circ\text{C}$
- Includes manual tub/shower diverter
- $6\frac{5}{8}''$ Tub Spout reach
- $62\frac{1}{2}''$ Overall rail height
- Tub Spout Flow Rate: 5.3 gpm (20 L/min) at 45 PSI
- Switch between hand shower and shower head shower via built-in diverter
- Bar with adjustable height hand shower holder

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

Color:

- 26177 000 chrome