Universal Pressure Balance Rough-In valve


MODEL # 35015000












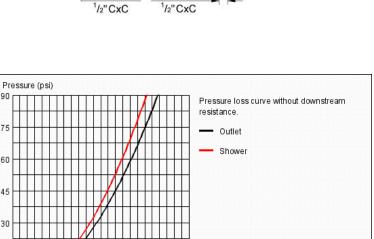

5.625

Q (gal/min)

7.5



Product Description:

Universal Pressure Balance Rough-In valve

Standard Specification:

- Handle limit stop
- Diaphragm cartridge
- Check valves
- Service stops
- Includes cap and plug for 3-port installation
- Universal connection is 1/2" male by copper sweat
- Max Flow Rate (top port) 5.5 gpm at 45 psi (21 l/min), (bottom port) 5.8 gpm at 45 psi (22 l/min)

Applicable Codes & Standards:

- Energy Policy Act of 1992
- ASME A112.18.1/CSA B125.1

Color:

□ 35015000