
# Starkk Collection 52" Starkk Ceiling Fan NBR

300173NBR (Natural Brass)

|--|

### **Dimensions**

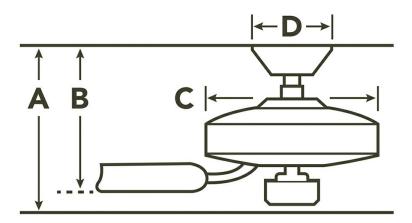

Downrod	Α	В	С	D
1.00 OD X 4.50	14.10	9.90	10.75	6.30

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

#### **Product Information**

Product ID	300173NBR
Finish	Natural Brass
Blade Finish	Medium Cherry/Dark Cherry
Collection	Starkk Collection

### Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	161	4290	82	.44	53
Med	111	2932	116	.31	25
High	59	1545	184	.18	8

## **Specifications**

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 17MM
Motor Type	AC

## Downlight


Downlight Included	Yes
Light Source	Halogen
Downlight Bulb Included	Included
Downlight Bulb Type	JDE11
Number of Lights/LEDs	1
Max or Nominal Watt	75W
Glass Description	Satin Etched
Optional Light Kit Available	No



7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com



1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.





# Starkk Collection 52" Starkk Ceiling Fan NBR

300173NBR (Natural Brass)

#### **Available Finishes**

Finish	Fixture	Glass	Blade 1	Blade 2
Olde Bronze	300173OZ	SATIN ETCHED	WALNUT	CHERRY
Brushed Nickel	300173NI	SATIN ETCHED	SILVER	WALNUT
Polished Nickel	300173PN	SATIN ETCHED	SILVER	WALNUT
Satin Black	300173SBK	SATIN ETCHED	SATIN BLACK	SATIN BLACK
White	300173WH	SATIN ETCHED	WHITE	WHITE
Matte White	300173MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE
Natural Brass	300173NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY

**Control Options** 

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

## Safety Listings & Certifications

Floor

Installation requirements securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes	, ,	
Installation  The electrical junction box and support structure must securely mounted and capable of reliably support a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support 120V 60Hz AC  Hanging Weight 17.9 LBS  Minimum Distance Between	Safety Rated	Dry
The electrical junction box and support structure must securely mounted and capable of reliably support a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support 120V 60Hz AC  Hanging Weight 17.9 LBS  Minimum Distance Between	Warranty	www.kichler.com/warranty
and support structure must securely mounted and capable of reliably support a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support 120V 60Hz AC Hanging Weight 17.9 LBS  Minimum Distance Between	Installation	
Hanging Weight 17.9 LBS Minimum Distance Between	Installation requirements	and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed
Minimum Distance Between	Electrical Requirements	120V 60Hz AC
	Hanging Weight	17.9 LBS
		7.5 feet