
Renew Collection 50 Inch Renew Fan BSS

330100BSS (Brushed Stainless Steel)



Dimensions

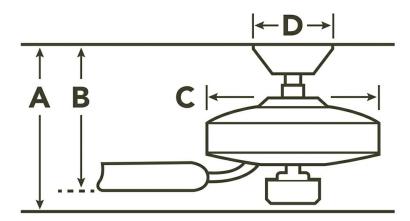

| Downrod | Α | В | С | D |
|----------------|-------|-------|-------|------|
| 1.00 OD X 4.00 | 12.75 | 10.50 | 11.75 | 5.90 |
| FLUSH MOUNT | 9.25 | 7.00 | 11.75 | 5.90 |

Available Finishes

| Project Name: | |
|---------------|--|
| Location: | |
| Туре: | |
| Qty: | |
| Comments: | |

Product Information

| Product ID | 330100BSS | |
|--------------|-------------------------|--|
| Finish | Brushed Stainless Steel | |
| Blade Finish | Dark Oak/Medium Oak | |
| Collection | Renew Collection | |

Airflow, Power and Efficiency

| Speed | RPM | CFM | CFM/ Watt | Amps | Watts |
|-------|-----|------|-----------|------|-------|
| Low | 214 | 5685 | 87 | .58 | 66 |
| Med | 160 | 4337 | 123 | .43 | 35 |
| High | 70 | 2102 | 217 | .23 | 10 |

Specifications

| Number of Blades | 5 |
|---------------------------|--------------------------|
| Blades Included | Yes |
| Blade Pitch | 12 Degrees |
| Blade Sweep | 50" |
| Blades Reversible | Yes |
| Blade Material | WOOD |
| Optional Blades Available | No |
| Downrod 1 | 1.00 OD X 4.00 |
| Downrod 2 | FLUSH MOUNT |
| Primary Control System | Pull Chain |
| Remote Included | No |
| Wall Control Included | No |
| Low Ceiling Adaptable | Yes, Dual Mount Included |
| Lead Wire Length | 78.00" |
| Motor Size | 153MM X 15MM |
| Motor Type | AC |
| | |

Downlight

Optional Light Kit Available No

Safety Listings & Certifications

| | <u> </u> |
|--------------|--------------------------|
| Safety Rated | Dry |
| Energy Star | Yes |
| Warranty | www.kichler.com/warranty |

Installation

The electrical junction box and support structure must be




7711 East Pleasant Valley Road Cleveland, Ohio 44131-8010 Toll free: 866.558.5706 or kichler.com

Notes

Information provided is subject to change without notice.

All values are design or typical values when measured under laboratory conditions.





Renew Collection 50 Inch Renew Fan BSS

330100BSS (Brushed Stainless Steel)

| Finish | Fixture | Glass | Blade 1 | Blade 2 |
|----------------------------|-----------|-------|-----------------|--------------------|
| Brushed Stainless Steel | 330100BSS | N/A | DARK OAK | MEDIUM OAK |
| Brushed Nickel | 330100NI | N/A | LIGHT CHERRY | WALNUT |
| Oil Brushed Bronze | 330100OBB | N/A | LIGHT CHERRY | WALNUT |
| Tannery Bronze | 330100TZ | N/A | TEAK | DARK CHERRY |
| White | 330100WH | N/A | WHITE | WHITE |
| Matte White | 330100MWH | | MATTE WHITE | WEATHR WHT WLNT |
| Sterling Gold | 330100SGD | | WALNUT | STERLING GOLD |

| LUCATION. | |
|---|---|
| Туре: | |
| Qty: | |
| Comments: | |
| | |
| Installation requirements | securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support"" |
| Electrical Requirements | 120V 60Hz AC |
| Hanging Weight | 25.3 LBS |
| Minimum Distance Between Bottom Of Fan Blade To Floor | 7.5 feet |
| | |

Project Name: _

Control Options

| Product ID | Descr |
|------------|--------------------------------|
| 337001WH | Universal Remote Control |
| 337012ALM | 4 Speed Fan Slide Control |
| 337012IV | 4 Speed Fan Slide Control |
| 337012WH | 4 Speed Fan Slide Control |
| 337214 | Limited Function Cooltouch |
| 370039MUL | Wall Control System L-Function |
| 370040 | 4 Speed Rotary Switch 10 AMP |