
# Starkk Collection 42" Starkk LED Ceiling Fan NI

330171NI (Brushed Nickel)



## **Dimensions**

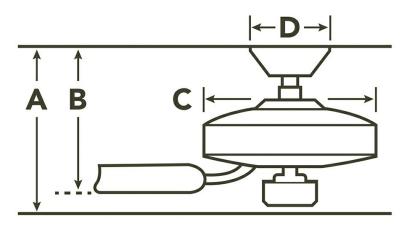

Downrod	Α	В	С	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

### **Available Finishes**

Finish	Fixture	Glass	Blade 1	Blade 2

Project Name:	
Location:	
Туре:	
Qty:	
Comments:	

### **Product Information**

Product ID	330171NI
Finish	Brushed Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

### Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	228	3560	74	.4	48
Med	172	2916	114	.3	26
High	116	1826	163	.21	11

### **Specifications**

Opcomoditorio	
Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	153MM X 12MM
Motor Type	AC

## Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Color Rendering Index	80

## Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty





# Starkk Collection 42" Starkk LED Ceiling Fan NI

330171NI (Brushed Nickel)

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

Project Name: _		
Location:		
Type:		
Qty:		
Comments:		

#### Installation

motanation	
Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical junction boxes marked "For Fan Support"
Electrical Requirements	120V 60Hz AC

**Control Options** 

Product ID	Descr
371042MUL	56K Wall Control System Basic