

Starkk Collection

42" Starkk LED Ceiling Fan PN

330171PN (Polished Nickel)

Project Name: _____

Location: _____


Type: _____

Qty: _____

Comments: _____



Dimensions

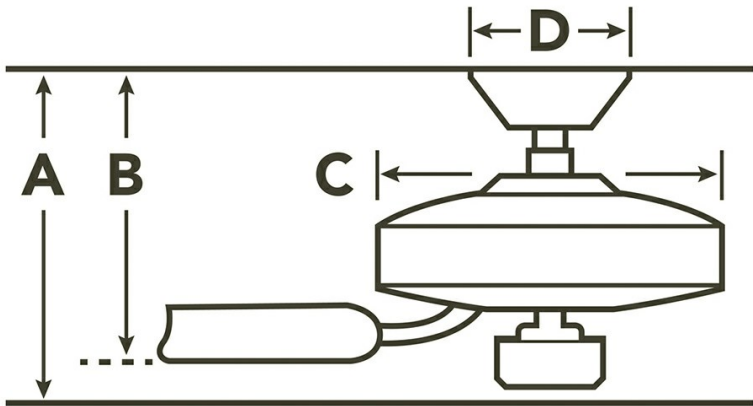

Downrod	A	B	C	D
1.00 OD X 4.50	14.15	9.75	10.50	6.30

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Product Information

Product ID	330171PN
Finish	Polished Nickel
Blade Finish	Silver/Walnut
Collection	Starkk Collection

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	228	3560	74	.4	48
Med	172	2916	114	.3	26
High	116	1826	163	.21	11

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	42"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	No
Motor Size	153MM X 12MM
Motor Type	AC

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Number of Lights/LEDs	1
Glass Description	Etched Cased Opal
Color Rendering Index	80

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Starkk Collection

42" Starkk LED Ceiling Fan PN

330171PN (Polished Nickel)

Project Name: _____

Location: _____

Type: _____

Qty: _____

Comments: _____

Finish	Fixture	Glass	Blade 1	Blade 2
Natural Brass	330171NBR	ETCHED CASED OPAL	MEDIUM CHERRY	DARK CHERRY
Brushed Nickel	330171NI	ETCHED CASED OPAL	SILVER	WALNUT
Olde Bronze	330171OZ	ETCHED CASED OPAL	WALNUT	CHERRY
Polished Nickel	330171PN	ETCHED CASED OPAL	SILVER	WALNUT
Matte White	330171MWH	ETCHED CASED OPAL	MATTE WHITE	MATTE WHITE

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical junction boxes marked "For Fan Support"
Electrical Requirements	120V 60Hz AC

Control Options

Product ID	Descr
371042MUL	56K Wall Control System Basic