

Sutter Place Premier Collectio

52" Sutter Place Premier Fan MWH

339400MWH

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Product Information

Product ID	339400MWH
Blade Finish	Matte White/Matte White
Collection	Sutter Place Premier Collectio

Airflow, Power and Efficiency

Speed	RPM	CFM	CFM/ Watt	Amps	Watts
Low	160	4500	76	.49	59
Med	113	3196	114	.35	28
High	62	1602	169	.2	10

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	12 Degrees
Blade Sweep	52"
Blades Reversible	Yes
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.00
Primary Control System	Pull Chain
Remote Included	No
Wall Control Included	No
Low Ceiling Adaptable	Yes
Motor Size	153MM X 15MM
Motor Type	AC

Downlight


Downlight Included	Yes
Light Source	Incandescent
Downlight Bulb Included	Included
Downlight Bulb Type	B10
Number of Lights/LEDs	3
Max or Nominal Watt	60W
Glass Description	White Alabaster

Safety Listings & Certifications

Safety Rated	Dry
Warranty	www.kichler.com/warranty

Installation

Dimensions

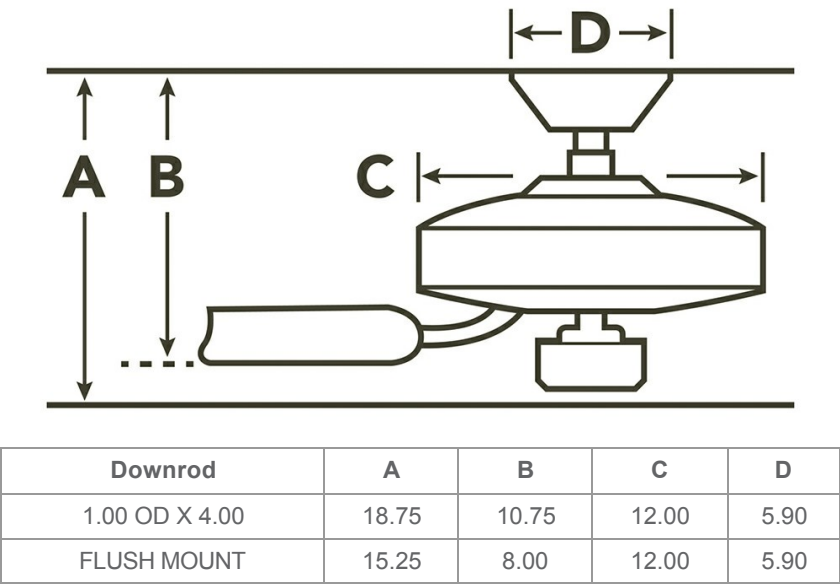

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Kichler  
7711 East Pleasant Valley Road  
Cleveland, Ohio 44131-8010  
Toll free: 866.558.5706 or kichler.com

Notes:  
1) Information provided is subject to change without notice.  
All values are design or typical values when measured under laboratory conditions.  
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

KICHLER

Sutter Place Premier Collectio

52" Sutter Place Premier Fan MWH

339400MWH

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Type: \_\_\_\_\_

Qty: \_\_\_\_\_

Comments: \_\_\_\_\_

Antique Pewter	339400AP	SATIN ETCHED	LIGHT CHERRY	DARK CHERRY
Oil Brushed Bronze	339400OBB	UMBER ALABASTER	WALNUT	MEDIUM CHERRY
Olde Bronze	339400OZ	UMBER ALABASTER	WALNUT	MEDIUM CHERRY
Matte White	339400MWH	WHITE ALABASTER	MATTE WHITE	MATTE WHITE

Installation requirements	The electrical junction box and support structure must be securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL listed electrical junction boxes marked "For Fan Support"
Electrical Requirements	120V 60Hz AC
Minimum Distance Between Bottom Of Fan Blade To Floor	7.5 feet

Control Options

Product ID	Descr
337001WH	Universal Remote Control
337010ALM	Fan 4 Speed-Light Dimmer
337010IV	Fan 4 Speed-Light Dimmer
337010WH	Fan 4 Speed-Light Dimmer
337011ALM	Fan Light Dimmer Control
337011IV	Fan Light Dimmer Control
337011WH	Fan Light Dimmer Control
337012ALM	4 Speed Fan Slide Control
337012IV	4 Speed Fan Slide Control
337012WH	4 Speed Fan Slide Control
337214	Limited Function Cooltouch
370039MUL	Wall Control System L-Function
371042MUL	56K Wall Control System Basic