


INSTRUCTIONS


For Assembling and Installing Fixtures in Canada
Pour L'assemblage et L'installation Au Canada

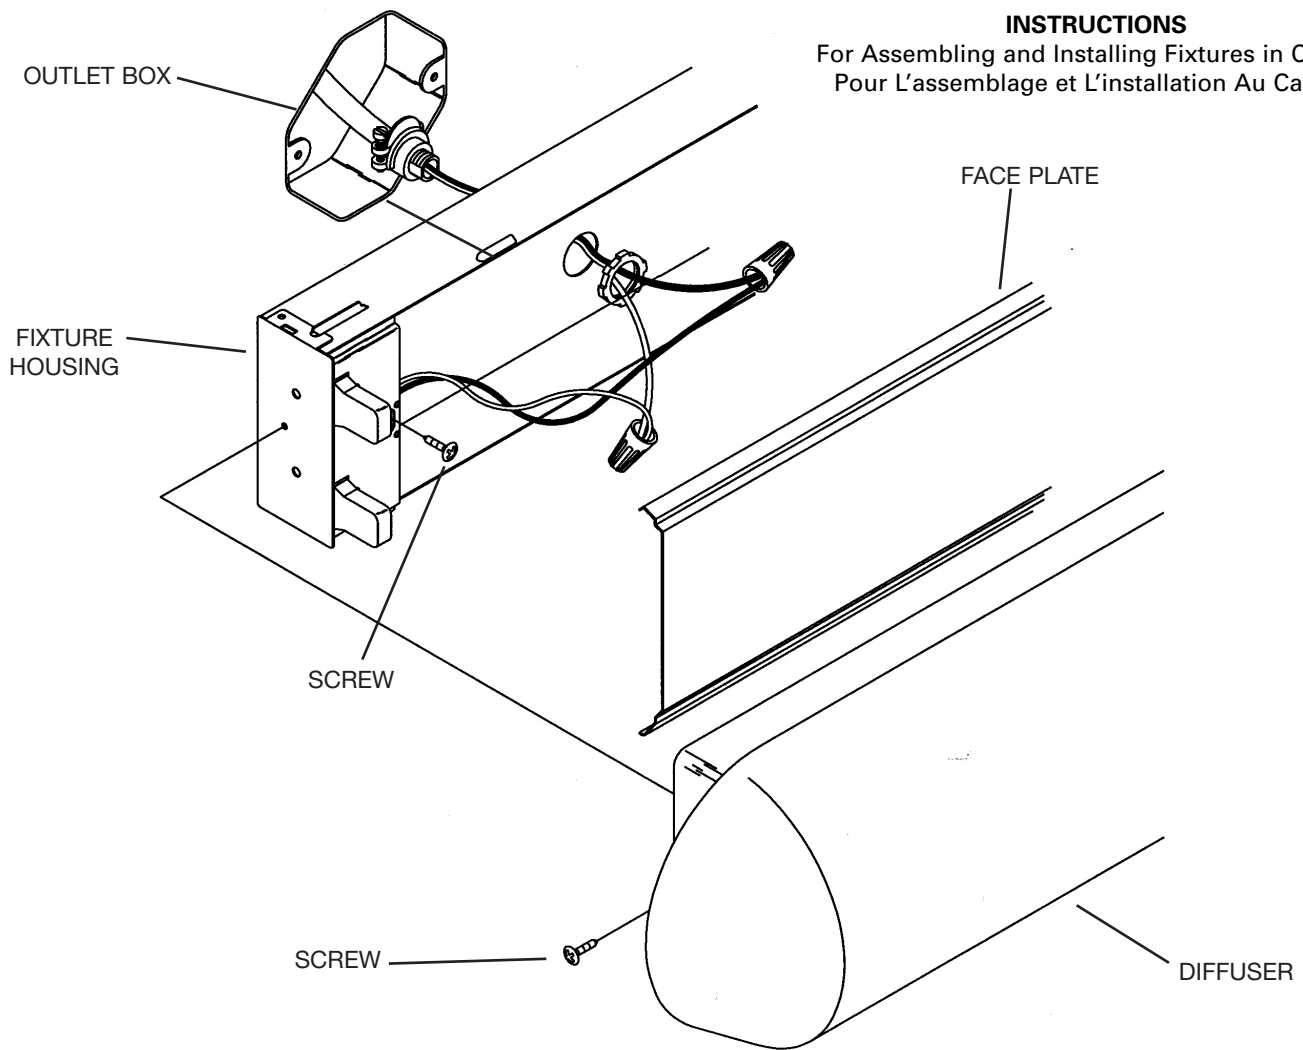

- 1) Turn off power.
- 2) Assemble conduit connector to knocked-out hole on fixture housing.
- 3) Run wire through assembled conduit connector.
- 4) Tighten screws on conduit connector to clamp conduit in position.
- 5) Make wire connections (connectors not provided). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 6) Secure fixture housing to outlet box.
- 7) Slide faceplate onto backpan.
- 8) Fit diffuser over fixture housing.
- 9) Secure diffuser to fixture housing with screws.