

INTERCONNECT CABLE INSTALLATION INSTRUCTIONS

Before Installing:

All installations should comply with National and local electrical codes.

If you have any doubts concerning installation contact a qualified, licensed electrician.



NOTE: Read all instructions thoroughly before starting installation.


- 1) For use only with Kichler® LED 24VDC Class 2, 5 AMP MAX Cabinet Lighting fixtures and Accessories.
- 2) Hold interconnect cable to mounting surface and determine best path for cable. If interconnect cable is being run from cabinet to cabinet a notch such as a "V" could be cut in cabinet side panels to help keep cable out of sight. (Ref. Fig. 2)

NOTE: Interconnect cable is UL rated CL2. Installer should check with local building codes to determine if CL2 wire is allowed to run through floors, walls and ceilings.

- 3) Plug connector into end of LED fixture or accessory.
- 4) Peel backing off retaining clip(s) and affix to desired location(s). Surface should be as clean as possible. Drive pre-installed screw into the cabinet surface to secure the retaining clip to the surface.

NOTE: DO NOT OVER TIGHTEN SCREWS.

- 5) Slip Cable into clip(s) and snap closed.

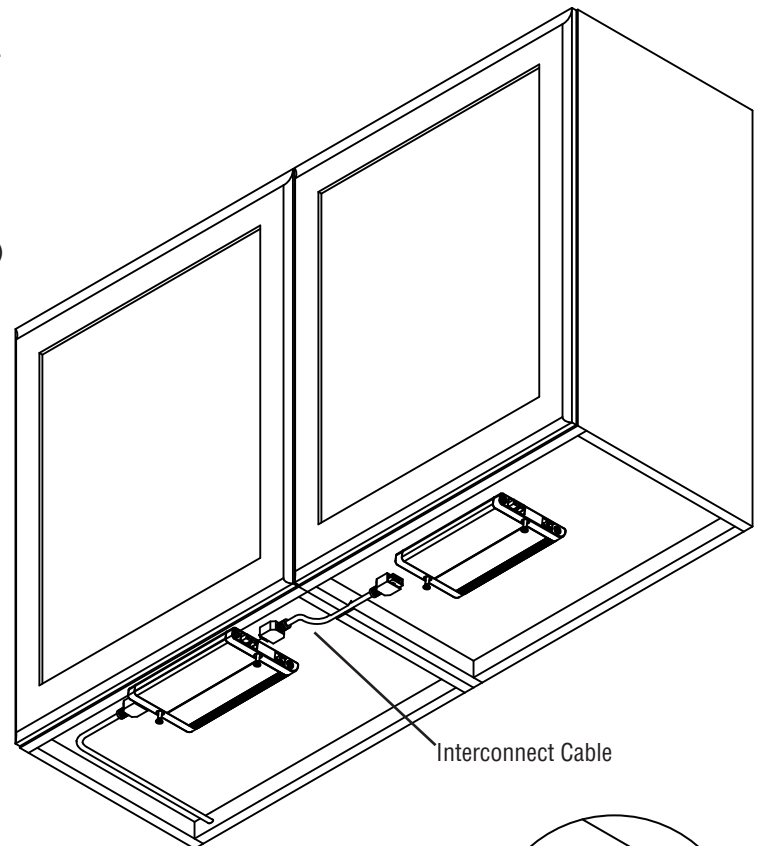

Cabinet Side Panel




Fig. 2

